


NonStop[®] Drip Emitters

Product Description

The Bowsmith NonStop emitter design, patented in 1974, is based on a simple unique principle found in no other emitter. This Pressure Cascade Principle permits the emitter to tolerate large amounts of suspended solids in irrigation water, without clogging and without the need for fine-mesh filter screens.

The BOWSMITH Principle: NonStop Continuous Self-Cleaning Action

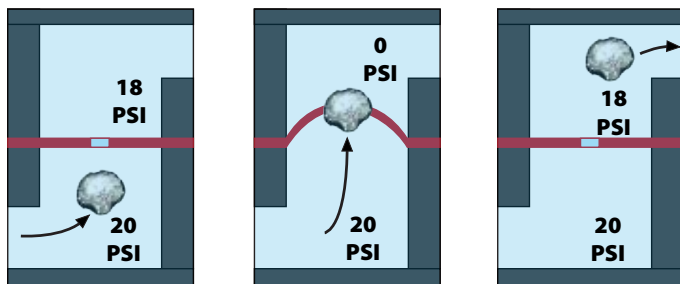

A

Orifice Open -
Low pressure
across diaphragm
(Approximately 2 psi)

B

Momentary Blockage -
High difference
pressure
(Up to line pressure)

C

Obstruction
pushed through -
Low difference
pressure restored

How it works

- 1 The flow path is a series of orifices in the silicone diaphragm.
- 2 In normal operation, the total pressure difference between inlet and outlet is divided equally across each of the orifices in the flow path.
- For example: 20 psi inlet pressure, and 10 orifices in the flow path, the pressure drop across each orifice is 2 psi.
- 3 If an obstruction should occur in any of the orifices, the flow through that orifice will be momentarily restricted. As a result, the pressure drop across that orifice will increase, causing the orifice to enlarge until the obstruction has passed.

Notes

- 30-mesh filtration and 15 PSI emitter operating pressure are the recommended minimums for a NonStop emitter system.
- Manufacturer's variation, $C_v: \leq 0.05$

For over 40 years, millions of Bowsmith NonStop emitters have demonstrated that the unique NonStop Continuous Self-Cleaning Action (Pressure Cascade Principle) really works, even under conditions that would quickly clog ordinary emitters. With only 30-mesh filtration (recommended minimum), Bowsmith NonStop emitters have operated successfully with water containing heavy concentrations of sand, silt, iron bacteria "slime", calcium carbonates, even algae and moss.

This means:

- Trees & Plants will be Irrigated
- Reduction in Plant Loss and Stress
- Less Maintenance-Lower Labor Costs
- Lower Capital Investment in Filtration Equipment.

Bowsmith emitters are available in single and multi outlet models, and with flow rates of 0.3 gph, 0.6 gph, 1.0 gph, 2.0 gph and 3.0 gph.



"ML" Series









"SL" Series




"SB" Series

NonStop® Drip Emitters

	Description	Model No.	Stock No.	Specifications—Nominal Flow @ 20 PSI
"SB" Series 	Single barb outlet, 0.175" barb, either can be used as inlet/outlet.	SB-03	6119	0.3 GPH (1.1 LPH) (Black Insert)
		SB-06	6120	0.6 GPH (2.3 LPH) (Green Insert)
		SB-10	6121	1.0 GPH (3.8 LPH) (Blue Insert)
		SB-20	6123	2.0 GPH (7.6 LPH) (Red Insert)
		SB-30	6124	3.0 GPH (11.4 LPH) (Yellow Insert)
"SL200" Series 	Single outlet, 1/2" FPT inlet. barbed elbow outlet port.	SL206	6034	0.6 GPH (2.3 LPH) (Green Port)
		SL210	6035	1.0 GPH (3.8 LPH) (Blue Port)
		SL220	6036	2.0 GPH (7.6 LPH) (Red Port)
		SL230	6037	3.0 GPH (11.4 LPH) (Yellow Port)
"M200" Series 	6 outlets open, 0.250" barb inlet. Includes full set of elbow/outlet caps and line plugs.	M206	7063	0.6 GPH (2.3 LPH) (Green Cap)
		M210	7064	1.0 GPH (3.8 LPH) (Blue Cap)
		M220	7066	2.0 GPH (7.6 LPH) (Red Cap)
		M230	7067	3.0 GPH (11.4 LPH) (Yellow Cap)
"ML200" Series 	6 outlets open, 1/2" FPT inlet. Includes full set of elbow/outlet caps and line plugs.	ML206	7068	0.6 GPH (2.3 LPH) (Green Cap)
		ML210	7069	1.0 GPH (3.8 LPH) (Blue Cap)
		ML220	7071	2.0 GPH (7.6 LPH) (Red Cap)
		ML230	7072	3.0 GPH (11.4 LPH) (Yellow Cap)
Series "2000" Flow Distributor 	6 outlets open, 1/2" FPT inlet. Includes full set of elbow/outlet caps and line plugs.	FD-2010	6075	1.0 GPH (3.8 LPH) @ 15-100 PSI (Blue End)
		FD-2020	6080	2.0 GPH (7.6 LPH) @ 15-100 PSI (Red Cap)
"Gripper" Series 	Single outlet, barb inlet, gripper sleeve • Available factory installed on Bowsmith tubing.	NSG-06	6050	0.6 GPH (2.3 LPH) (Green End)
		NSG-10	6051	1.0 GPH (3.8 LPH) (Blue End)
		NSG-20	6053	2.0 GPH (7.6 LPH) (Red End)
		NSG-30	6056	3.0 GPH (11.4 LPH) (Yellow End)

NonStop Drip Emitters

Nominal Performance

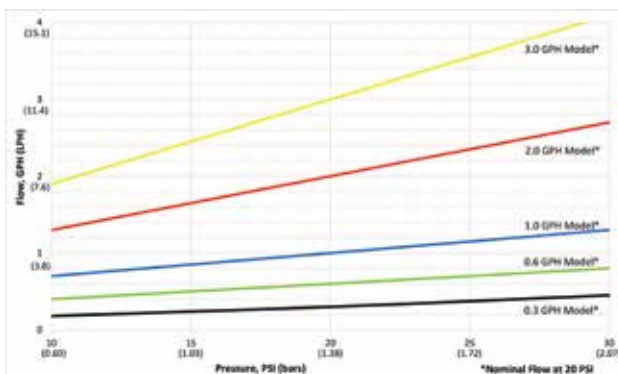

Notes

- 30-mesh filtration and 15 PSI emitter operating pressure are the recommended minimums for a NonStop emitter system.
- Manufacturer's variation, C_v : ≤ 0.05


NonStop[®] Drip Emitters

SB Series



- Single outlet.
- 0.175" O.D. inlet/outlet barb connections on opposite ends. Either can be used as outlet.
- Accessories: riser or feeder tubing for extending the emitter away from the water supply. See the illustration, below.

Connection/Extension Options



Stock No	Model No.	Nominal Flow*
6119	SB-03 (Black Insert)	0.3 GPH (1.1 LPH)
6120	SB-06 (Green Insert)	0.6 GPH (2.3 LPH)
6121	SB-10 (Blue Insert)	1.0 GPH (3.8 LPH)
6123	SB-20 (Red Insert)	2.0 GPH (7.6 LPH)
6124	SB-30 (Yellow Insert)	3.0 GPH (11.4 LPH)

* Nominal Flow @ 20 PSI

M200 Series




- Six open outlets. Each maintains its own flow path.
- 0.250" barb inlet.
- Includes full set (6 each) of elbow/outlet caps, and line plugs.
- One-piece elbow/outlet cap fixes position of elbow to prevent it from coming loose in application. 0.175" barb for secure attachment of spreader tubing.
- The elbow is easily reversed to cap off any unused outlets.
- Line plugs can be placed in the end of the spreader tubes to help keep bugs out, but still allow passage of water.

Stock No	Model No.	Nominal Flow* each open outlet
7063	M206 (Green Cap)	0.6 GPH (2.3 LPH)
7064	M210 (Blue Cap)	1.0 GPH (3.8 LPH)
7066	M220 (Red Cap)	2.0 GPH (7.6 LPH)
7067	M230 (Yellow Cap)	3.0 GPH (11.4 LPH)

* Nominal Flow @ 20 PSI

NonStop Drip Emitters Nominal Performance

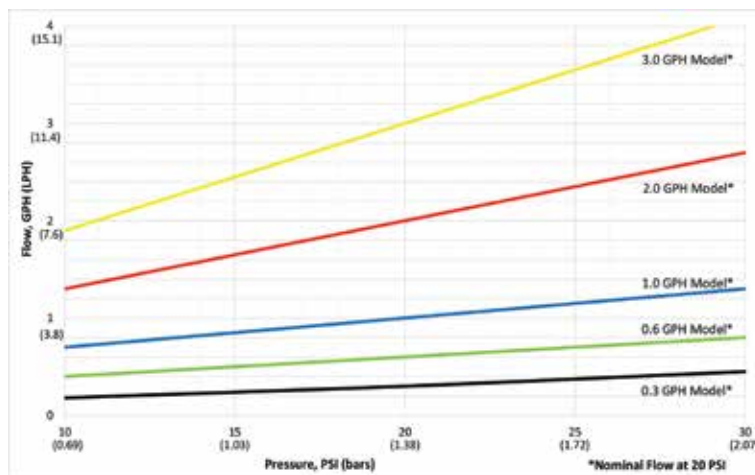


Notes

- Manufacturer's variation, $C_v \leq 0.05$
- 30-mesh filtration and 15 PSI emitter operating pressure are the recommended minimums for a Non-Stop emitter system.



NonStop[®] Drip Emitters

Series 2000 Flow Distributor



- Two devices in one: drip emitter and pressure regulator.
- Pressure regulator operates on supply pressure from 15 to 100 PSI.
- Pressure regulator valve uses durable, accurate stainless steel spring.
- Six open outlets. Each maintains its own flow path.
- 1/2" FPT inlet.
- Includes full set (6 each) of elbow/outlet caps, and line plugs.
- One-piece elbow/outlet cap fixes position of elbow to prevent it from coming loose in application. 0.175" barb for secure attachment of spreader tubing.
- The elbow is easily reversed to cap off any unused outlets.
- Line plugs can be placed in the end of the spreader tubes to help keep bugs out, but still allow passage of water.

Stock No	Model No.	Nominal Flow*
6075	FD-2010 (Blue Cap)	1.0 GPH (3.8 LPH)
6080	FD-2020 (Red Cap)	2.0 GPH (7.6 LPH)

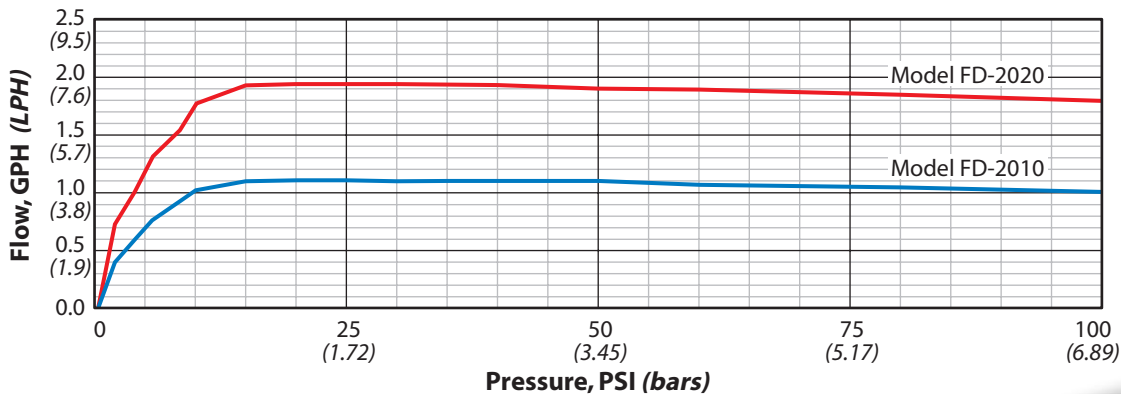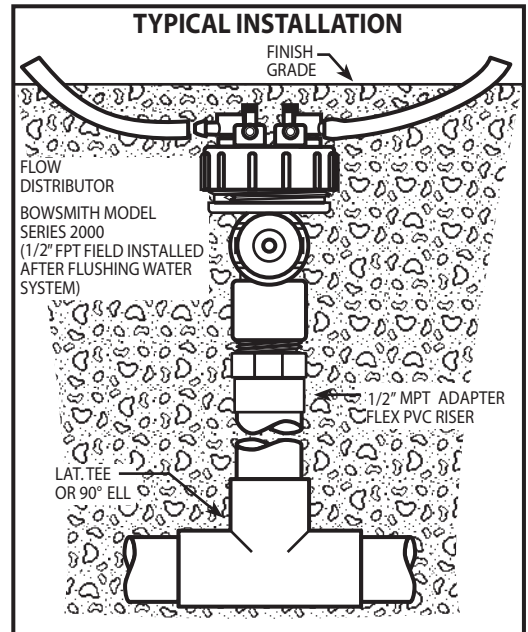

NonStop® Drip Emitters

SL200 Series





- Barbed elbow outlet port for connecting spreader tubing, if desired.
- Industry standard 1/2" FPT connection in cap.
- Silicone O-ring inside cap for leak-free connections.
- Constructed of tough engineering grade plastic with UV inhibitors.

Stock No	Model No.	Nominal Flow*
6034	SL206 (Green Port)	0.6 GPH (2.3 LPH)
6035	SL210 (Blue Port)	1.0 GPH (3.8 LPH)
6036	SL220 (Red Port)	2.0 GPH (7.6 LPH)
6037	SL230 (Yellow Port)	3.0 GPH (11.4 LPH)

* Nominal Flow @ 20 PSI

Installation Examples

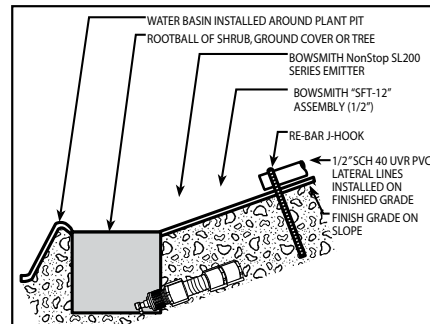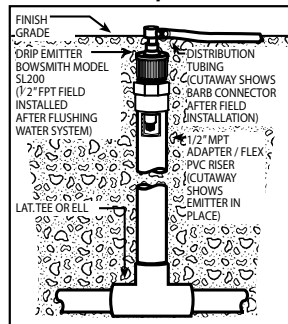

ML200 Series




- Six open outlets. Each maintains its own flow path.
- 1/2" FPT inlet.
- Includes full set (6 each) of elbow/outlet caps, and line plugs.
- One-piece elbow/outlet cap fixes position of elbow to prevent it from coming loose in application. 0.175" barb for secure attachment of spreader tubing.
- The elbow is easily reversed to cap off any unused outlets.
- Line plugs can be placed in the end of the spreader tubes to help keep bugs out, but still allow passage of water.

Stock No	Model No.	Nominal Flow* each open outlet
7068	ML206 (Green Cap)	0.6 GPH (2.3 LPH)
7069	ML210 (Blue Cap)	1.0 GPH (3.8 LPH)
7071	ML220 (Red Cap)	2.0 GPH (7.6 LPH)
7072	ML230 (Yellow Cap)	3.0 GPH (11.4 LPH)

* Nominal Flow @ 20 PSI

NonStop Drip Emitters Nominal Performance

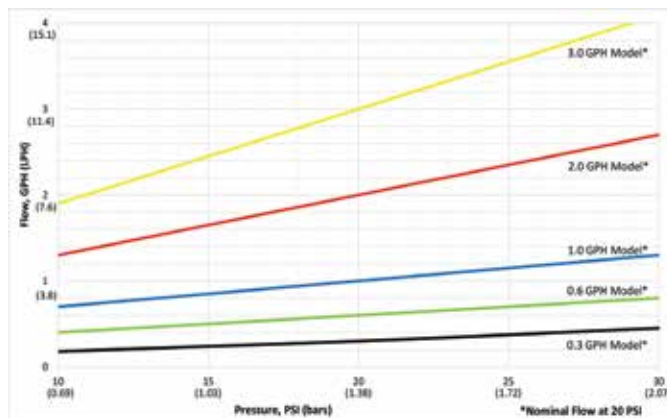


Notes

- Manufacturer's variation, $C_v \leq 0.05$
- 30-mesh filtration and 15 PSI emitter operating pressure are the recommended minimums for a Non-Stop emitter system.


NonStop[®] Drip Emitters

Typical Installation Examples

TYPICAL INSTALLATION

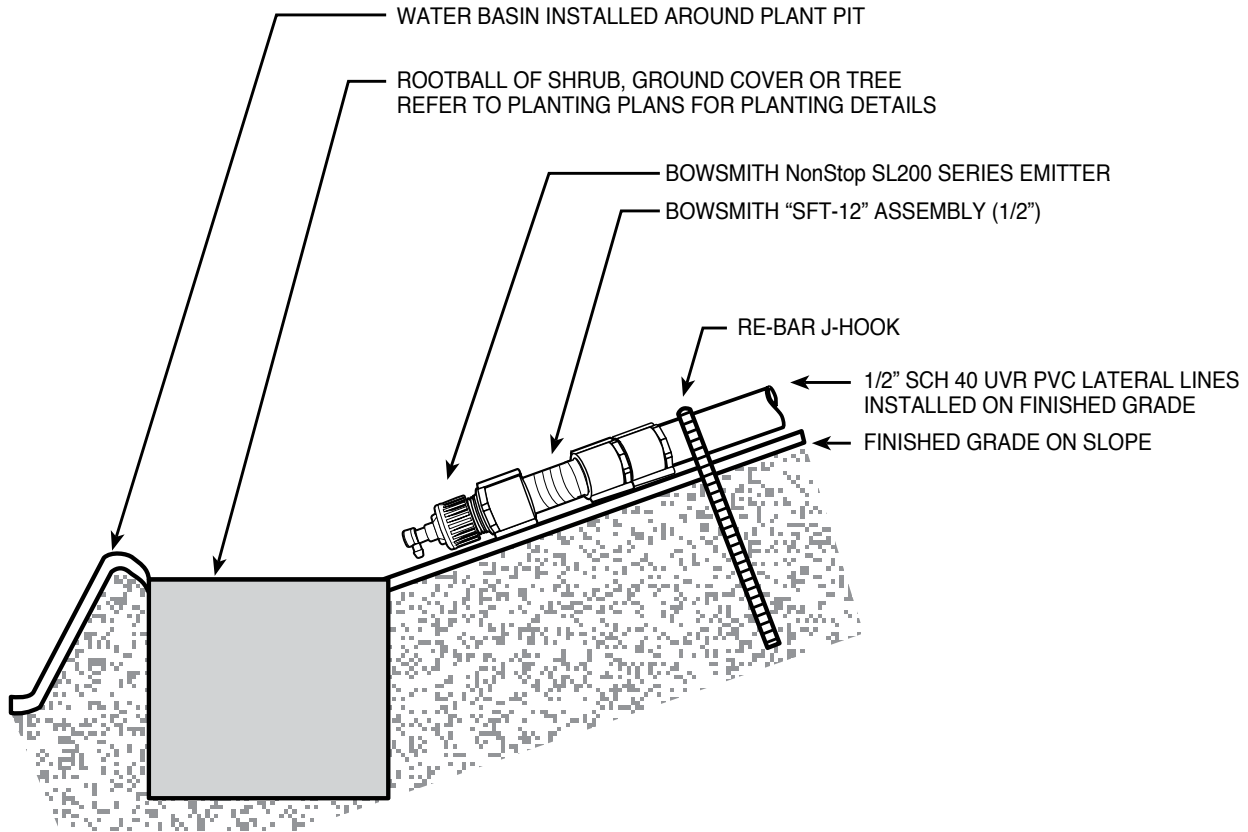

BOWSMITH "SUPER FLEX" TUBE ASSEMBLY



BOWSMITH "SL200" EMITTER



NOTE:
DRIP EMITTER SHALL BE PLACED TO DROP 8"-12" UPHILL FROM ROOTBALL.

PVC LATERAL SUPPLY LINES SHALL RUN PARALLEL TO SLOPE WITH DRIP
EMITTER LINES RUN PERPENDICULAR TO SLOPE AS SHOWN ABOVE.

New Low Flow Model: SB-03!!

SB Series

Product Description

The Bowsmith NonStop emitter design, patented in 1974, is based on a simple unique principle found in no other emitter. This Pressure Cascade Principle permits the emitter to tolerate large amounts of suspended solids in irrigation water, without clogging and without the need for fine-mesh filter screens.



- Single outlet.
- 0.175" O.D. inlet/outlet barb connections on opposite ends. Either can be used as outlet.
- Accessories: riser or feeder tubing for extending the emitter away from the water supply. See the illustration, below.

Advantages of Low Flow Model: SB-03


- Virtually clog resistant.
- Design of the SB Series emitter reduces the need for harsh chemicals to "clean" emitters therefore, saving money and time.
- Lower/Slower flows can reduce channeling in fast draining soil or media.
- Ability to run multiple emitters around the root zone without changing system flow rate, optimizing root zone coverage to encourage healthier plant growth.
- Precise control over irrigation events such as pulsing to properly dose nutrients and water.

Notes


- 30-mesh filtration and 15 PSI emitter operating pressure are the recommended minimums for a NonStop emitter system.
- Manufacturer's variation, $C_v \leq 0.05$

Stock No	Model No.	Nominal Flow*
6119	SB-03 (Black Insert)	0.3 GPH (1.1 LPH)
6120	SB-06 (Green Insert)	0.6 GPH (2.3 LPH)
6121	SB-10 (Blue Insert)	1.0 GPH (3.8 LPH)
6123	SB-20 (Red Insert)	2.0 GPH (7.6 LPH)
6124	SB-30 (Yellow Insert)	3.0 GPH (11.4 LPH)

* Nominal Flow @ 20 PSI

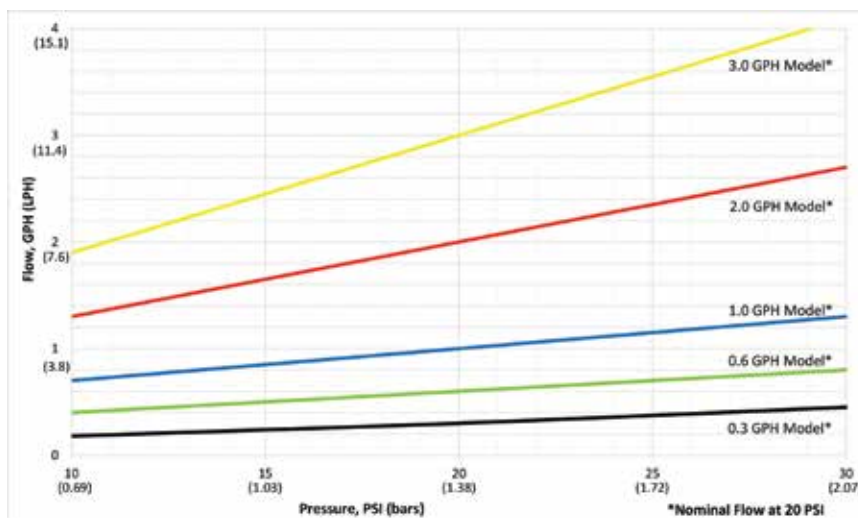

Connection/Extension Options

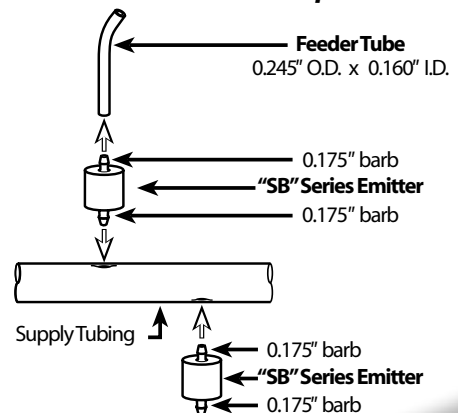




Tru-Flo™ Drip Emitters

Product Description

The Tru-Flow mechanism is a moderately priced alternative to Bowsmith NonStop emitter, ideal for irrigation systems where the levels of suspended solids are not as severe as those requiring the unmatched clog resistance of the NonStop. With their exceptionally large flow passages, Tru-Flo emitters outperform virtually all fixed orifice and pressure compensating emitters made by other manufacturers.




Long, tortuous flow path with big cross-section allows passage of large particles and creates turbulence to keep fine particles moving through the emitter.

	Description	Model No.	Specifications
 <p>"Gripper" Series</p>	Single outlet, barb inlet, gripper sleeve. • Available factory installed on Bowsmith tubing.	TFG-05	0.5 GPH (1.9 LPH)* (Green End)
		TFG-10	1.0 GPH (3.8 LPH)* (Blue End)
		TFG-20	2.0 GPH (7.6 LPH)* (Red End)
 <p>"Shur-Lok"™ Series</p>	Single outlet, twin barb connection.	TFS-05	0.5 GPH (1.9 LPH)* (Green End)
		TFS-10	1.0 GPH (3.8 LPH)* (Blue End)
		TFS-20	2.0 GPH (7.6 LPH)* (Red End)
 <p>"VGT" Series</p>	Single outlet, single barb connection. Clip/wire retention hook for vine trellis wire installations. <i>Model numbers ending with "-7" fit Bowsmith 700 series size tubing. Those ending with "-8" fit Bowsmith 800 series size tubing.</i>	VGT-05-7	0.5 GPH (1.9 LPH)* (Green End)
		VGT-10-7	1.0 GPH (3.8 LPH)* (Blue End)
		VGT-20-7	2.0 GPH (7.6 LPH)* (Red End)
		VGT-05-8	0.5 GPH (1.9 LPH)* (Green End)
		VGT-10-8	1.0 GPH (3.8 LPH)* (Blue End)
		VGT-20-8	2.0 GPH (7.6 LPH)* (Red End)

*Nominal Flow @ 15 PSI
See Nominal Performance graphs for these models on following pages.

Tru-Flo Drip Emitters Nominal Performance

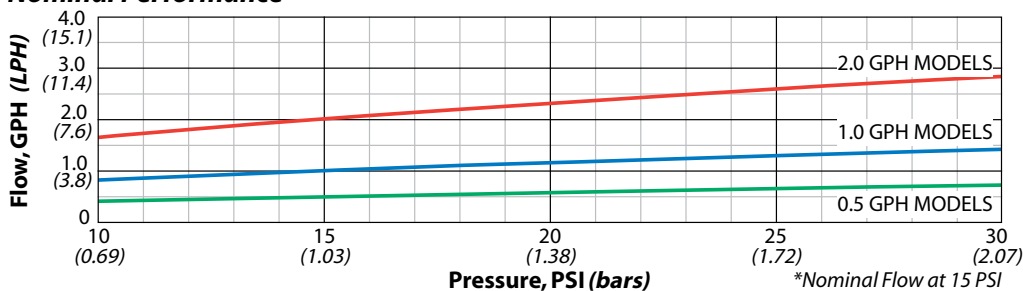

Notes

- Manufacturer's variation, $C_v \leq 0.02$
- Avg. Emitter Exponent = 0.5

Tru-Flo™ Drip Emitters

“Gripper” — TFG Series



- Integral wraparound “Gripper” sleeve keeps emitter securely attached on the tubing during handling, shipping, installation and use.
- Available in standard packaging for hand installation, or pre-installed on Bowsmith tubing for far less than the cost of installation by hand.
- Recommended tubing sizes: 0.625” to 0.835” O.D.
- Top quality, UV resistant polypropylene casing enhances durability.

Stock No	Model No.	Nominal Flow*
6090	TFG-05 (Green End)	0.5 GPH (1.9 LPH)
6091	TFG-10 (Blue End)	1.0 GPH (3.8 LPH)
6092	TFG-20 (Red End)	2.0 GPH (7.6 LPH)

* Nominal Flow @ 15 PSI

“Shur-Lok” — TFS Series



- Twin-barb connection provides for highly reliable connection to virtually any size PE supply tubing.
- Stabilizing barb flexes with the natural movement of the supply tubing, preventing the emitter from coming loose or leaking at the inlet port.
- Tubing Sizes: 0.625” O.D. or larger.
- Top quality, UV resistant polypropylene casing enhances durability.

Stock No.	Model No.	Nominal Flow*
6095	TFS-05 (Green End)	0.5 GPH (1.9 LPH)
6096	TFS-10 (Blue End)	1.0 GPH (3.8 LPH)
6097	TFS-20 (Red End)	2.0 GPH (7.6 LPH)

* Nominal Flow @ 15 PSI

“VG” — VGT Series




- High-strength clip secures emitter/hose combination to the vine trellis wire for fast, reliable installation.
- Wire retention hook on the clip assures a tight, secure wire attachment. Protects against accidental damage during harvest and pruning.
- Downward emitter orientation assures water drips at the emitter and does not run down the hose.
- Tubing sizes: models to fit either Bowsmith 700 or 800 series size tubing.

Stock No.	Model No.	Tubing Size Range	Nominal Flow*
6100	VGT-05-7 (Green End)	700 series	0.5 GPH (1.9 LPH)
6101	VGT-10-7 (Blue End)	700 series	1.0 GPH (3.8 LPH)
6103	VGT-20-7 (Red End)	700 series	2.0 GPH (7.6 LPH)
6104	VGT-05-8 (Green End)	800 series	0.5 GPH (1.9 LPH)
6105	VGT-10-8 (Blue End)	800 series	1.0 GPH (3.8 LPH)
6107	VGT-20-8 (Red End)	800 series	2.0 GPH (7.6 LPH)

* Nominal Flow @ 15 PSI

Tru-Flo Drip Emitters Nominal Performance

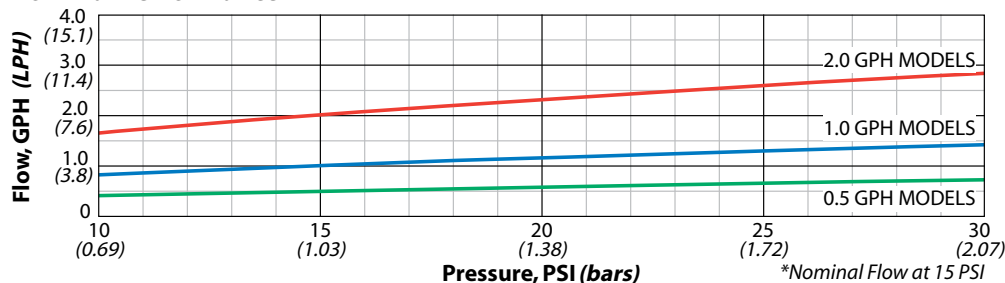

Notes

- Manufacturer's variation, $C_v: \leq 0.02$
- Avg. Emitter Exponent = 0.5

"PCI" Series

Pressure Compensating Inline Drip Tubing

Features

- Unique flow regulating concept: wide effective labyrinth, leading into the flow control chamber, where a sensitive floating diaphragm regulates and maintains a constant flow rate at variable inlet pressure.
- High clog resistance:
 - Dropper's large intake filter is continuously flushed by the water flow.
 - Large cross section on labyrinth.
 - Self-cleaning mechanism at the flow regulated water outlet.
- Uniform flows from 7-60 PSI.
- Manufactured from high quality resins.
- Contains a minimum of 2% carbon black.
- Multi-season use.
- Available in a standard, custom or skip spacing.




Tubing specifications

O.D. mm (in.)	I.D. mm (in.)	Avg. Wall Thickness mm (in.)
16 (0.640)	14 (0.560)	1.02 (0.040)
18 (0.710)	16 (0.625)	1.08 (0.0425)
20 (0.790)	18 (0.700)	1.14 (0.045)

Available Flow Rates (GPH)

	0.26	0.32	0.42	0.53	0.61	0.92	1.00
16 mm			x	x			x
18 mm	x	x	x	x	x	x	x
20 mm	x	x	x	x	x	x	x

Emitter Flow Performance

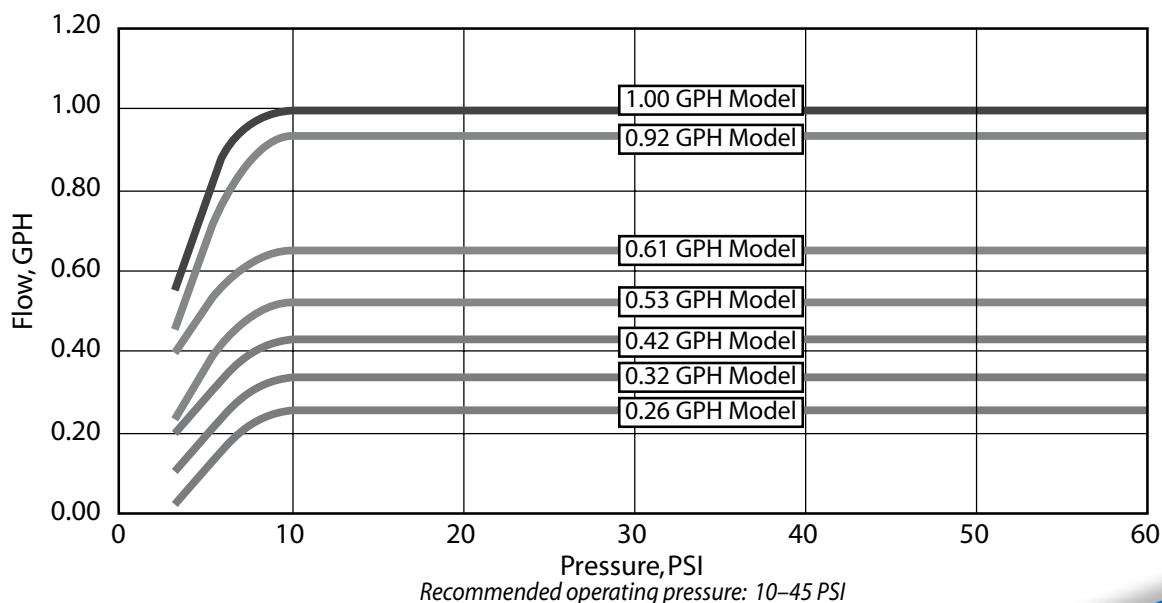

"TFI" Series

Tru-Flo™ Inline Drip Tubing

Features

In-line emitters installed in the tube

Turbulent flow drip emitter

Benefits

- Emitters are factory installed for accurate spacing.
- Smooth profile for efficient lay-out.
- Less emitter damage during field installation.

- Labyrinth design creates velocity—flushes small particles.
- Large water passages are highly clog-resistant.
- Extremely accurate flow rate.
- Cost-effective irrigation.



Cutaway shows the wide turbulent flow path in the TFI Series Drip Tubing.

Tubing specifications

O.D. mm (in.)	I.D. mm (in.)	Avg. Wall Thickness mm (in.)
16 (0.640)	14 (0.560)	1.02 (0.040)
18 (0.710)	16 (0.625)	1.08 (0.0425)
20 (0.790)	18 (0.700)	1.14 (0.045)

Maximum number of emitters and lateral run lengths (±5% allowable flow variation; level ground)

TFI 16mm Series

Flow Rate (gph)	Emitter Spacing (inches)									
	18		24		30		36		42	
	Qty Emitters / Length (ft)	Qty Emitters / Length (ft)	Qty Emitters / Length (ft)	Qty Emitters / Length (ft)	Qty Emitters / Length (ft)	Qty Emitters / Length (ft)	Qty Emitters / Length (ft)	Qty Emitters / Length (ft)	Qty Emitters / Length (ft)	Qty Emitters / Length (ft)
.42	210	315	195	390	173	434	171	515	164	575
.50	166	250	150	300	140	350	133	400	128	450
1.0	113	170	102	205	94	235	90	270	88	310

TFI 18mm Series

Flow Rate (gph)	Emitter Spacing (inches)									
	18		24		30		36		42	
	Qty Emitters / Length (ft)	Qty Emitters / Length (ft)	Qty Emitters / Length (ft)	Qty Emitters / Length (ft)	Qty Emitters / Length (ft)	Qty Emitters / Length (ft)	Qty Emitters / Length (ft)	Qty Emitters / Length (ft)	Qty Emitters / Length (ft)	Qty Emitters / Length (ft)
.50	263	395	237	474	218	547	204	614	193	677
1.0	169	254	152	305	140	351	131	395	124	436

TFI 20mm Series

Flow Rate (gph)	Emitter Spacing (inches)									
	18		24		30		36		42	
	Qty Emitters / Length (ft)	Qty Emitters / Length (ft)	Qty Emitters / Length (ft)	Qty Emitters / Length (ft)	Qty Emitters / Length (ft)	Qty Emitters / Length (ft)	Qty Emitters / Length (ft)	Qty Emitters / Length (ft)	Qty Emitters / Length (ft)	Qty Emitters / Length (ft)
.50	316	475	285	571	263	658	246	739	232	815
1.0	203	305	183	367	169	423	158	475	149	524

Flow Rate (gph)	Pressure (psi)						
	10	15	20	25	30	35	40
0.42	.34	.42	.49	.55	.60	.66	.71
0.50	.41	.50	.58	.65	.72	.77	.83
1.00	.81	1.00	1.15	1.29	1.41	1.52	1.63

BigFoot[®]
Drip Tape



BigFoot[®] 3.0
Premium Row Crop Drip Tape

*Superior design to maximize
uniformity and crop yields*

BOWSMITH[®] 

BigFoot® 3.0

Product Guide

Ordering Information					Outlet Spacing (in)	Flow Rates					
Tape Size Diameter		Spacing Code (in)	Flow Code	*Custom Flow		Q / 100 ft				Emitter	
5 = 5/8"	7 = 7/8"					GPM		GPH		GPH	
xx = mil Wall Thickness						8 psi	10 psi	8 psi	10 psi	8 psi	10 psi
05, 06, 08, 10, 12, 15	05, 06, 08, 10, 12, 15										
5xx-06-200	7xx-06-200	06	200		6	0.20	0.23	12	14	0.06	0.07
5xx-12-100	7xx-12-100	12	100		12	0.10	0.12	6	7		
5xx-18-070	7xx-18-070	18	070		18	0.07	0.08	4	5		
5xx-24-050	7xx-24-050	24	050		24	0.05	0.06	3	4		
5xx-06-230	7xx-06-230	06	230		6	0.23	0.26	14	16	0.07	0.08
5xx-12-120	7xx-12-120	12	120		12	0.12	0.13	7	8		
5xx-18-080	7xx-18-080	18	080		18	0.08	0.09	5	5		
5xx-24-060	7xx-24-060	24	060		24	0.06	0.07	4	4		
5xx-06-260	7xx-06-260	06	260	*	6	0.26	0.29	15.6	17.4	0.078	0.087
5xx-04-450	7xx-04-450	04	450		4	0.45	0.50	27	30	0.09	0.10
5xx-08-230	7xx-08-230	08	230		8	0.23	0.25	14	15		
5xx-12-150	7xx-12-150	12	150		12	0.15	0.17	9	10.2		
5xx-16-110	7xx-16-110	16	110		16	0.11	0.125	7	7.5		
5xx-24-110	7xx-24-110	24	075		24	0.075	0.083	4.5	5		
5xx-04-500	7xx-04-500	04	500		4	0.50	0.56	30	34		
5xx-08-250	7xx-08-250	08	250		8	0.25	0.28	15	17	0.10	0.112
5xx-12-170	7xx-12-170	12	170		12	0.17	0.19	10	11		
5xx-16-130	7xx-16-130	16	130		16	0.13	0.14	8	8		
5xx-24-080	7xx-24-080	24	080		24	0.08	0.09	5	5		
5xx-04-670	7xx-04-670	04	670		4	0.67	0.75	40	45		
5xx-08-340	7xx-08-340	08	340		8	0.34	0.37	20	22	0.13	0.15
5xx-12-220	7xx-12-220	12	220		12	0.22	0.25	13	15		
5xx-16-170	7xx-16-170	16	170		16	0.17	0.19	10	11		
5xx-24-110	7xx-24-110	24	110		24	0.11	0.12	7	7		
5xx-04-1.00	7xx-04-1.00	04	1.00		4	1.05	1.15	63	69		
5xx-08-500	7xx-08-500	08	500		8	0.52	0.57	31	34	0.21	0.23
5xx-12-350	7xx-12-350	12	350		12	0.35	0.38	21	23		
5xx-16-260	7xx-16-260	16	260		16	0.26	0.29	16	17		
5xx-24-170	7xx-24-170	24	170		24	0.17	0.19	10	11		
5xx-04-1.34	7xx-04-1.34	04	1.34		4	1.34	1.50	80	90		
5xx-08-670	7xx-08-670	08	670		8	0.67	0.75	40	45	0.27	0.30
5xx-12-450	7xx-12-450	12	450		12	0.45	0.50	27	30		
5xx-16-340	7xx-16-340	16	340		16	0.34	0.37	20	22		
5xx-24-220	7xx-24-220	24	220		24	0.22	0.25	13	15		

* Custom Flows Available

$C_v \leq 0.03$ Emitter Exponent = 0.5

BigFoot® 3.0 Premium Drip Tape

BigFoot 3.0 rockets past every other drip tape on the market.

- Next generation Tru-Flo turbulent flow pathway technology—the result of over 35 years of turbulent flow research, development and manufacturing from Bowsmith.
- Unsurpassed clog resistance is achieved when combined with the innovative and unique water inlet filters design.
- The superior technology of BigFoot 3.0 delivers reliability, uniformity and maximizes crop yields.
- The BigFoot 3.0 continuous precision molded flow path and seamless construction, provides both strength and reliability during installation and retrieval.
- Available in 0.05 to 1.50, Q/100 (gpm/100 ft) flow rates.
- Available emitter spacing (in) of 4, 6, 8, 12, 16, 18, 20, 24.
 - No additional cost for closer emitter spacing.
- Various wall thickness (mil) available for seasonal, or multi-season (SDI) applications.
- The precision cut, outlet slit, provides superior protection against soil ingestion and root intrusion.
- Bright white stripes “up” insures proper outlet placement, and makes it easy to find for the field workers.
- No other drip tape matches the performance of BigFoot 3.0.



Available Configurations

Flow Rates (GPM/100ft) @ 8 psi	.05, .06, .07, .08, .10, .11, .12, .13, .17, .19, .20, .22, .23, .25, .26, .34, .35, .38, .45, .52, .67, .75, 1.05, 1.34
Standard Spacings (in)	4, 6, 8, 12
Additional Spacings (in)	16, 18, 20, 24
Nominal Diameters (in)	5/8, 7/8
5/8 Tape Wall Thickness (mil)	5, 6, 8, 10, 12, 15
7/8 Tape Wall Thickness (mil)	5, 6, 8, 10, 12, 15
Outlet	Knife Cut Slit

Operating Specifications

Diameter	Wall Thickness	Operating psi		bar		Reel Length	
		min	max	min	max	ft	meters
5/8" (16mm)	5 mil	4	10	0.3	0.7	13,000	3,962
	6 mil	4	12	0.3	0.8	10,000	3,048
	8 mil	4	15	0.3	1.0	8,000	2,438
	10 mil	4	15	0.3	1.0	7,000	2,134
	12 mil	4	15	0.3	1.0	5,250	1,600
	15 mil	4	15	0.3	1.0	4,250	1,295
7/8" (22mm)	5 mil	4	10	0.3	0.7	9,000	2,743
	6 mil	4	12	0.3	0.8	8,000	2,438
	8 mil	4	15	0.3	1.0	6,500	1,981
	10 mil	4	15	0.3	1.0	4,500	1,372
	12 mil	4	15	0.3	1.0	4,000	1,219
	15 mil	4	15	0.3	1.0	2,700	823
	15 mil	4	15	0.3	1.0	3,000	914
Nominal Operating Pressure @ 8psi (0.3 bar)							

RELIABLE PERFORMANCE

- Next generation Tru-Flo labyrinth provides maximum turbulence and unmatched uniformity.
- Unsurpassed clog resistance with unique water inlet filters design, separates large particles from entering flow path.
- Ultra-high strength saves on time and labor.
- The precision cut, outlet slit, reduces the risk of soil ingestion and root intrusion.
- Super Design = Profits

BigFoot® 3.0

Run Length Guides

		Nominal Flows		5/8"				7/8"				
Outlet	Emitter	Q - 100 / Feet		Maximum Run Length				Maximum Run Length				
Spacing	Flow Rate	GPM/100ft	GPH/100ft	in feet				in feet				
in	cm	gph	at 8 psi	Emmision Uniformity				Emmision Uniformity				
				94%	92%	90%	85%	94%	92%	90%	85%	
6	15	0.06	0.20	12	580	740	855	1080	1030	1320	1525	1920
12	30		0.10	6	900	1150	1335	1680	1610	2060	2360	2995
18	45		0.07	4	1170	1490	1730	2175	2075	2660	3085	3870
24	60		0.05	3	1410	1790	2075	2610	2505	3200	3710	4660
6	15	0.07	0.23	14	525	670	775	978	940	1200	1390	1750
12	30		0.12	7	815	1040	1210	1520	1450	1865	2150	2720
18	45		0.08	5	1070	1350	1560	1970	1890	2400	2790	3515
24	60		0.06	3	1280	1625	1880	2365	2260	2900	3350	4225
4	10	0.10	0.50	30	311	411	470	573	553	730	834	1017
8	20		0.25	15	448	644	736	898	720	1144	1308	1594
12	30		0.17	10	635	838	958	1169	937	1490	1702	2075
16	40		0.13	8	764	1010	1152	1408	1128	1796	2050	2500
24	60	0.13	0.08	5	980	1316	1502	1830	1468	2336	2730	3252
4	10		0.67	40	275	348	403	510	490	625	725	910
8	20		0.34	20	425	540	628	872	765	970	1120	1415
12	30		0.22	13	555	700	810	1025	990	1257	1455	1835
16	40	0.21	0.17	10	665	845	975	1230	1180	1510	1740	2200
24	60		0.11	7	860	1095	1260	1595	1525	1955	2260	2845
4	10		1.05	63	200	257	297	376	360	460	535	672
8	20		0.52	31	315	400	462	583	560	715	830	1045
12	30	0.27	0.35	21	408	515	598	755	720	920	1072	1350
16	40		0.26	16	490	620	720	906	870	1110	1290	1620
24	60		0.17	10	630	805	930	1175	1120	1440	1660	2100
4	10		1.34	80	172	218	254	320	305	393	455	574
8	20	0.27	0.67	40	265	340	395	498	480	610	705	890
12	30		0.45	27	345	440	510	642	620	790	915	1150
16	40		0.34	20	415	530	612	772	740	945	1095	1380
24	60		0.22	13	540	685	790	998	960	1220	1420	1790

Single run uniformity on flat ground (0% slope) 8 psi nominal, 10 psi inlet pressure

Drip Irrigation Formulas U.S. Units

APPLICATION RATE (IN/HR)
 $11.6 \times Q100$ (GPM per 100 ft.)
 Tape Lateral Spacing (in.)

FEET OF TAPE PER ACRE **GPM PER ACRE**
 $\frac{43,560 \times 12}{\text{Tape Lateral Spacing (in.)}}$ $\frac{\text{Feet of Tape/Acre}}{100} \times Q100$

Packaging Information



Reel Diameter: 22"
Reel Height: 11"
Core Width: 4"
Core Diameter: 1.5"
16 Coils per Pallet

Consult your Irrigation dealer to ensure appropriate system design and filtration requirements for your specific application.

Scan this code to find out more about our BigFoot® Drip Tape



P.O. Box 428 • Exeter, CA 93221 USA
 Toll-Free USA: 1-(800) BOWSMITH 1-(800)-269-7648
 P: (559) 592-9485 F: (559) 592-2314
www.bowsmith.com

Fan-Jet[®] Microsprinklers

Product Description

The Bowsmith Fan-Jet microsprinkler is the benchmark in low volume spray devices.


Developed by Bowsmith in 1977, the Fan-Jet's breakthrough design provided high spray trajectories, more consistent and larger wetting patterns, and lower cost in a water-saving, low-flow device. The 1986 introduction of the twin wedge post head design enabled a wider variety of wetting patterns, including full-circle. Today, the Fan-Jet remains the standard other microsprayers have to meet.

Fan-Jet's fixed splash plate design has no moving parts to wear out or jam. They're available in 18 different wetting patterns to suit virtually any low-volume or retrofit application. Color-coded nozzles in 7 different sizes offer even more customization possibilities.


There are other microsprinklers available; the Fan-Jet is made only by Bowsmith.

Fan-Jet Features

- 1 Exclusive Fan-Jet frame
 - Twin wedge post construction.
 - Durable, low profile, impact resistant.
 - Open design – no pockets to collect debris or harbor insects.
 - High grade copolymer material for limited creep and shrinkage. Splash plate maintains precise alignment over time.
- 2 Integral fixed splash plate
 - No moving parts to jam or wear out.
 - Stays aligned with nozzle for consistent patterns.
 - 18 spray patterns available.
- 3 Color coded nozzles
 - 7 sizes to choose from.
 - Quick-twist thread for fast, easy field installation.

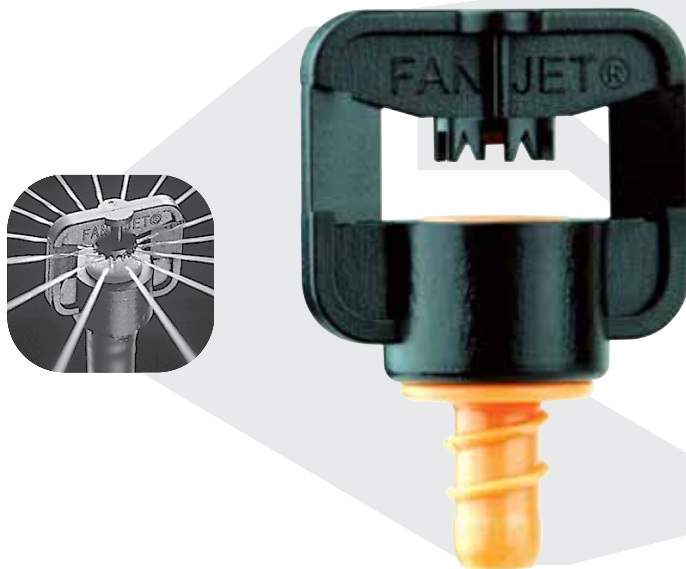

Spray patterns

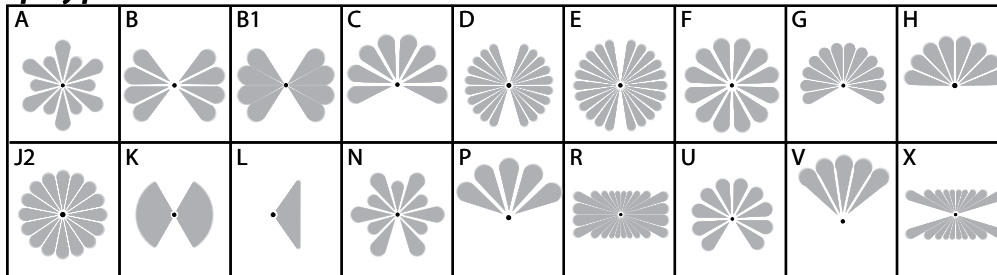

Nozzle sizes (color coded)

#30 (Black)	#35 (Orange)	#40 (Blue)	#45 (Violet)	#50 (Green)	#55 (Yellow)	#60 (Red)
-------------	--------------	------------	--------------	-------------	--------------	-----------

Fan-Jet[®] Microsprinklers

"SK" Series



Features

- Sprinkler / Feeder Tube Assembly:
 - Fan-Jet Microsprinkler Head
 - Feeder Tube
 - Barbed Coupling
- SK Stakes —*your choice*—
 - SK-J Stake:
 - 9" shank provides good support in soft ground.
 - Made of durable, impact resistant polypropylene.
 - 90° large radius feeder tube channel provides a durable, reliable assembly.
 - Low profile stake reduces damage and keeps feeder tubing level with ground.
 - Recommended for use with 0.245" O.D. polyethylene feedertubing for adjustable riser height.
 - OR—
 - SK-C Stake:
 - 13" shank for stability in particularly soft or sandy soils.
 - Made of durable, impact resistant polypropylene.
 - Positive lock clip and loop hole on shank retains flexible feeder tubing.
 - Recommended for use with vinyl feeder tubing.


"SK" Series Fan-Jet Model Numbers

Stock No.	Feeder Tubing* Len./Material	Fan-Jet Head	Coupling	SK Stake
8519	24" / PE	Specify by Nozzle Size and Pattern	Specify Standard Barb or Restrictor	Specify "J" or "C" Type
8520	36" / PE			
8523	48" / PE			
8524	60" / PE			
8521	72" / PE			
8530	24" / vinyl**			
8507	36" / vinyl**			
8534	48" / vinyl**			
8539	60" / vinyl**			
8304	72" / vinyl**			

* Feeder tubing: PE is 0.160" I.D. x 0.245" O.D.
Vinyl is 0.140" I.D. x 0.250" O.D.

**Vinyl feeder tubing stocked in Avon Park, FL plant only

Installation (shown with Type "J" Stake)

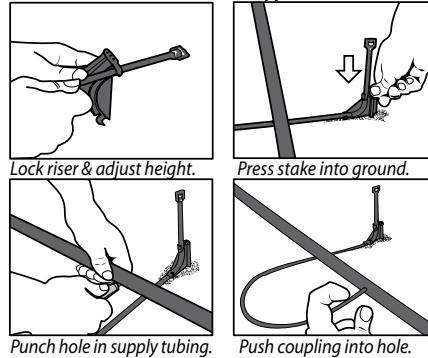

"SP" Series



Features


- All components factory-assembled for leak-free connections.
- Fan-Jet Microsprinkler Head
- Riser
- SP-1 Spike
 - Compact design for durability and easy, low-cost field installation and relocation.
 - Choice of barb or thread riser coupling integral with spike.

"SP" Series Fan-Jet Model Numbers

Stock No.	Riser* Len./Material	Fan-Jet Head	SP Spike
8655	3" / PE	Specify by Nozzle Size and Pattern	Assembled with Choice of #3018 Thread or #3028 Barb Spike
8656	6" / PE		

* Riser is 0.158" I.D. x 0.300" O.D.

Installation



Fan-Jet[®] Microsprinklers

"TB" Series



Features


- All components factory-assembled for leak-free connections.
- Fan-Jet Microsprinkler Head
- Riser
 - Heavy wall construction prevents kinks and provides stability, even at extended lengths.
 - Riser length to your specifications (see standard lengths available in the "TB" Series Fan-Jet Model numbers table, below).
- Threaded base
 - Choice of 3/8" MIPT or 1/2" MIPT.
 - "Wing nut" design for easy hand installation. No other tools necessary.
 - Can be used in place of rotary sprinklers or other spray devices with threaded bases.

"TB" Series Fan-Jet Model Numbers


Stock No.	Riser* Length	Fan-Jet Head	Threaded Base
8645	3"	Specify by Nozzle Size and Pattern	Assembled with Choice of 3/8" or 1/2" MIPT base
8646	6"		

* Riser is 0.158" I.D. x 0.300" O.D.

Installation



Place threaded base into threaded pipe fitting.



Hand tighten base firmly.

"DC" Series




Features

- All components factory-assembled for leak-free connections.
- Barb Coupling
 - Hard sharp edge for maximum retention to supply tubing.
 - Leak-free connection.
- Feeder Tube
 - Flexible thin wall tube for maintaining vertical head position with weighted sleeve.
- PVC Weighted Sleeve
 - Resists cracking.
 - Controlled diameter provides added sprinkler head retention.
- Fan-Jet Microsprinkler Head


"DC" Series Fan-Jet Model Numbers

Stock No.	Drop Tube* Length	Fan-Jet Head	PVC Weighted Sleeve	Barb Coupling
8686	12"	Specify by Nozzle Size and Pattern	Assembled with other components	Assembled with other components


Installation (see notes, at left)



Punch hole in supply tubing.



Push coupling into tubing.







Align tubing connection downward.

Installation Notes
















- When punching holes in supply tubing, be sure all holes are in a line. Use the printing on the tubing as a guide. Holes can be punched with the tubing either suspended or on the ground.
- When tubing is suspended, make sure all connectors and punched holes point directly downward. Again, the printing can be used as a guide.

Fan-Jet[®] Microsprinklers

	Description
<p>"SK" Series</p> 	<ul style="list-style-type: none"> • Fan-Jet head (Specify nozzle size and pattern.) • Feeder tube (Specify length.) • Coupling (Specify standard barbed or restrictor coupling.) • SK Stake (Specify SK-J or SK-C stake.) <p>• Available with Fan-Jet "PC" Pressure Compensator</p>
<p>"SP" Series</p> 	<ul style="list-style-type: none"> • Fan-Jet head (Specify nozzle size and pattern.) • Riser (Specify length.) • SP spike (Specify SP-T threaded riser connection -or- SP-B barb riser connection.) <p>• Available with Fan-Jet "PC" Pressure Compensator</p>
<p>"TB" Series</p> 	<ul style="list-style-type: none"> • Fan-Jet head (Specify nozzle size and pattern.) • Riser (Specify length.) • Threaded base (Specify 3/8" or 1/2" MPT base.) <p>• Available with Fan-Jet "PC" Pressure Compensator</p>
<p>"DC" Series</p> 	<ul style="list-style-type: none"> • Fan-Jet head (Specify nozzle size and pattern.) • Drop tube (12" standard length.) • PVC weighted sleeve. • Barbed coupling. <p>• Available with Fan-Jet "PC" Pressure Compensator</p>

Fan-Jet[®] Microsprinklers



Fan-Jet Accessories

	Product	Description	Specifications	
Components	 SP-1	Stakes	Support riser and fix sprinkler location. Used in SK and SP Series Fan-Jet assemblies.	
	 SK-C			
	 SK-J			
		Risers	For TB & SP assemblies.	Heavy wall PE (0.300" O.D. x 0.160" I.D.) Standard lengths: 3, 6 or 12 inches.
		Feeder Tube / Coupling	For connecting PE supply tubing to Fan-Jet.	Specify PE or vinyl. Standard lengths: 24, 36, 48, 60 or 72 inches.
	Threaded base / riser	MIPT connection to Fan-Jet.	Specify 3/8" or 1/2" MIPT base. Standard riser lengths: 3, 6 or 12 inches.	
	Drop Tube and Weighted Sleeve	For DC assemblies.	Available separately: Drop tube and coupling: 12 inch standard length. PVC weighted sleeve.	
Couplings		Barbed Coupling	For connecting microtubing.	0.175" x 0.175" barb both ends.
		Line Plug	For plugging holes punched in PE supply tubing.	0.175" barb
		Threaded Bases	MIPT connections. Used in TB assemblies	Specify 3/8" MIPT or 1/2" MIPT base.
Tools		Nozzle Cleaner	For cleaning Type 2 Fan-Jet heads.	—
		Hole Punch	Punches holes for couplings in PE supply tubing.	Plastic one piece.
Flow Control Devices		Fan-Jet "PC" Series Pressure Compensators	Replaces barb coupling on feeder tube to provide pressure compensation to Fan-Jet head.	Please see separate sheet for more information.
		Flow Restrictor Couplings	Replaces barb coupling on feeder tube to reduce flow through larger nozzle sizes.	Please see separate sheet for more information.
		Top Hat™ Throw Limiter.	Snaps on Fan-Jet head to limit wetted area. Can be easily removed when larger wetted area is needed.	Fits any Bowsmith Type 2 Fan-Jet head.

Fan-Jet Advantage

Fan-Jets vs. Other Jets

Fan-Jet®
Microsprinklers

	Other Jets	Fan-Jet
Materials	 <p>Homopolymer material can overflex. Wetting pattern degrades over time. Softer material compromises feeder tube connections.</p>	 <p>High grade copolymer for limited creep and shrinkage. Maintains precise alignment over time. Prevents misalignment of splash plate that causes uneven wetting. High strength material maintains secure tubing connections.</p>
Design	<p>Larger heads provide less accurate wetting patterns and shorter throw distances. One-piece and other large open designs provide limited variety of patterns. 10-32 thread and other quick-disconnect methods take longer to install and/or pop off more easily.</p>	<p>Compact head maintains integrity with nozzle before water stream can "twist" and throw off wetting pattern accuracy. More resistant to accidental field damage.</p> <ul style="list-style-type: none"> • Splash plate design enables longer throw for larger root systems and higher yields. • Integral splash plate is precisely aligned with nozzle. • Enables a wide variety of spray patterns to precisely match the application. • Quick-turn thread reduces installation time. • NOTE: Only Fan-Jet microsprinklers offer all these features.
Manufacture	<p>Deficient materials used in manufacture can compromise field performance. Bowsmith service and product support has been unmatched in the industry since 1974.</p>	<p>Bowsmith experience: innovators in jet design and manufacture.</p> <ul style="list-style-type: none"> • 1977: Type 1 Fan-Jet introduced. Breakthrough design provides high spray trajectories, more consistent and larger wetting patterns, and lower cost. • 1986: Type 2 Fan-Jet with twin wedge post design introduced. Enables full circle wetting patterns and nozzle color-coding for easy field identification. Quick-turn thread introduced in 1992 speeds installation, provides stronger connection. <p>Bowsmith quality: painstaking quality control in every phase of manufacturing. Bowsmith service: outstanding reputation for service, product and warranty support.</p>

Fan-Jet[®] PLUS Microsprinklers

The Bowsmith Fan-Jet **PLUS**[™] micro-sprinkler combines the quality of the original Fan-Jet micro-sprinkler, plus the added feature that prevents clogging or pattern distortion due to insects and other external objects - saving you time and money.

- ♣ **Exclusive Fan-Jet PLUS "Dual Action" frame: pops-up & retracts**
- ♣ **All water contact surfaces are protected from insects and other external foreign objects**
- ♣ **No rotating parts to break, stick, or wear out.**
- ♣ **Simple take-a-part, two piece design allows for quick cleaning of nozzle clogged by particles in the irrigation water**
- ♣ **Five spray patterns available**
- ♣ **Seven color-coded flow rates: 6.0 to 29.4 gallons per hour**



Fan-Jet **PLUS**[™] Microsprinklers



NO BUGS!




Fan-Jet PLUS advantages over drip emitters:

- ♣ **Larger wetted area per tree = Larger root system**
- ♣ **Greater irrigation flexibility = Energy savings, soil aeration, & frost protection**
- ♣ **Priced lower than dual line drip = Better value**

Fan-Jet PLUS Advantages over rotary sprinklers:

- ♣ **Precision water placement = Better irrigation efficiency**
- ♣ **Precise delivery of fertilizers & micronutrients = Savings**
- ♣ **Low application rates = Better soil penetration and less runoff**
- ♣ **Lower operating pressures = Lower energy costs**
- ♣ **Lower price = Better value**

Spray Patterns

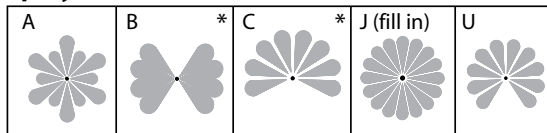

Flow Rates (gph @ 20 psi)

* Available Soon

6.0	8.4	10.7	14.2	16.7	20.5	24.0
#30 (Black)	#35 (Orange)	#40 (Blue)	#45 (Violet)	#50 (Green)	#55 (Yellow)	#60 (Red)

Fan-Jet®

"PC" and "PCND" Series

Pressure Compensators

Fan-Jet "PC" Series Model Numbers


Stock No.	Model No.	Color	Nominal Flow
3228	PC-3	Beige/Black	3.0 GPH
3229	PC-4	Brown/Black	4.0 GPH
3230	PC-6	Black/Black	6.0 GPH
3231	PC-8	Orange/Black	8.0 GPH
3232	PC-10	Blue/Black	10.0 GPH
3233	PC-12	Gray/Black	12.0 GPH
3234	PC-14	Violet/Black	14.0 GPH
3235	PC-18	Green/Black	18.0 GPH

Fan-Jet "PCND" Series Model Numbers

Stock No.	Model No.	Color	Nominal Flow
3328	PCND-3	Beige/Gray	3.0 GPH
3329	PCND-4	Brown/Gray	4.0 GPH
3330	PCND-6	Black/Gray	6.0 GPH
3331	PCND-8	Orange/Gray	8.0 GPH
3332	PCND-10	Blue/Gray	10.0 GPH
3333	PCND-12	Gray/Gray	12.0 GPH
3334	PCND-14	Violet/Gray	14.0 GPH
3335	PCND-18	Green/Gray	18.0 GPH

Features & Benefits

- Wide regulating range
 - Uniform flows, even at low or high pressures
- Low minimum operating pressure
 - Saves on energy costs
- Self-flushing throughout operation
 - High clog resistance
 - Less maintenance, higher crop yield
- Unique two-piece design
 - Allows for quick, easy cleaning
- Regulates microsprinklers
 - Pairs with multiple Fan-Jet nozzles
 - You choose the flow rate, pattern, and nozzle
 - Works at the end or middle of feeder tubes
- Available with Non-Drain feature, PCND (gray base)
 - Opening pressure 3.5 psi
 - Shutoff pressure 2.2 psi








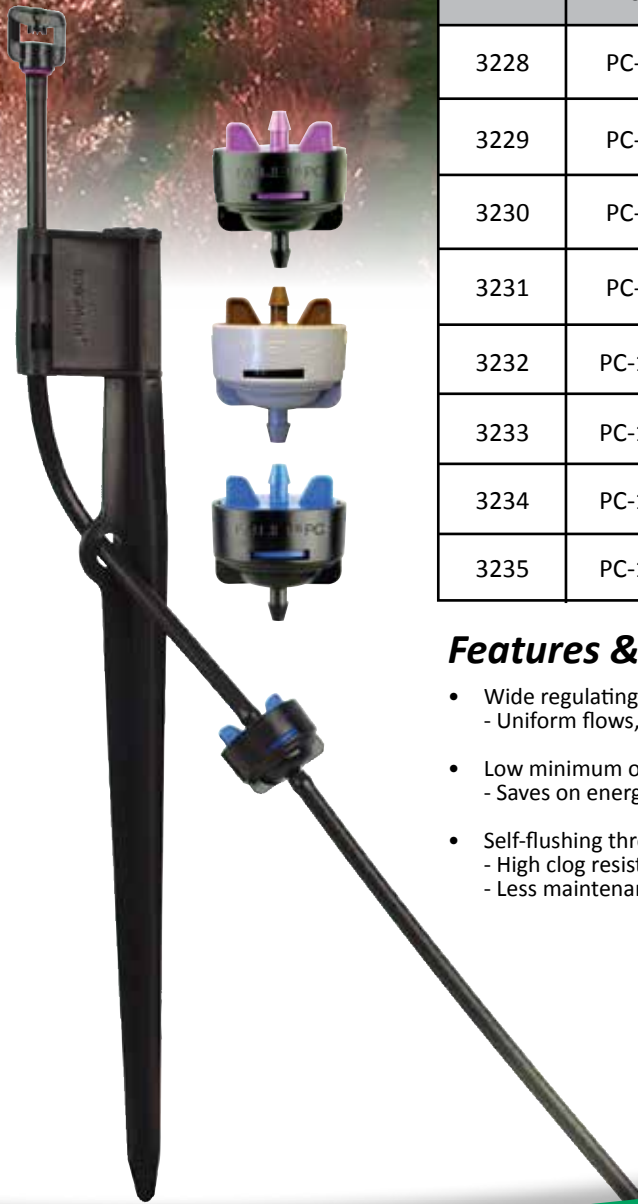


Fan-Jet®

"PC" and "PCND" Series

Pressure Compensators

● Minimum Operating Pressure

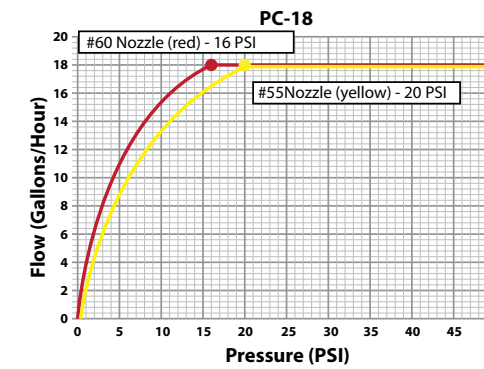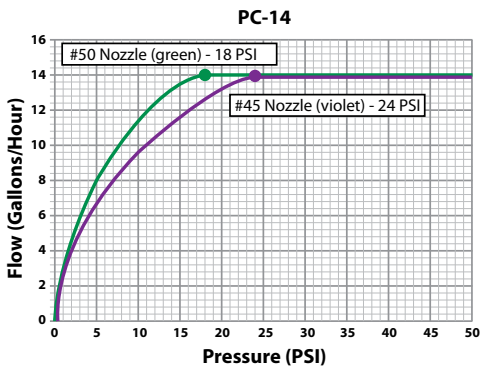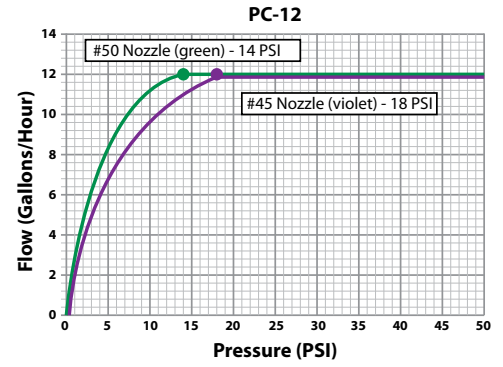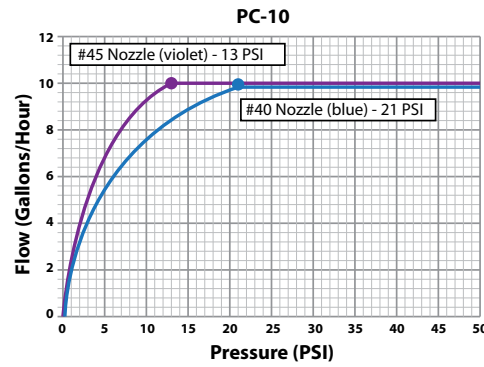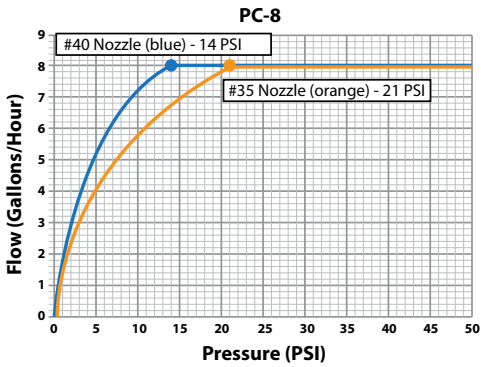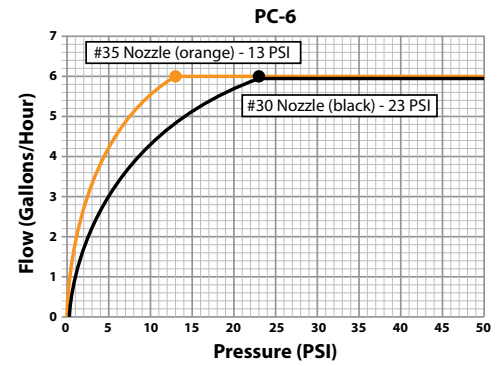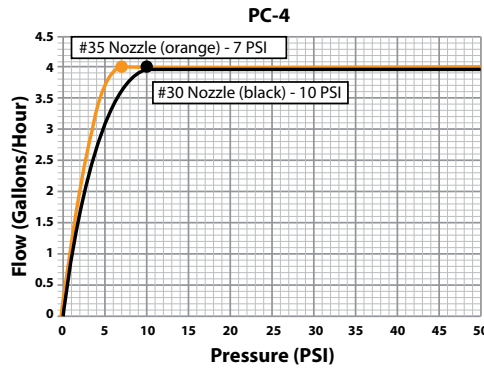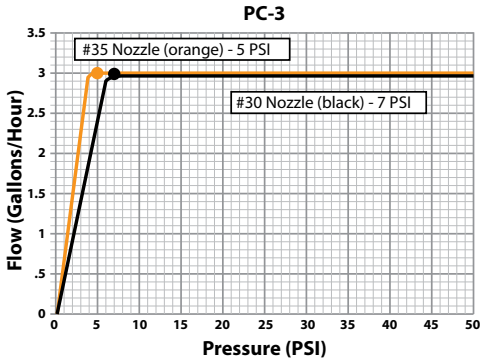

PCND Models -
Same Minimum Operating Pressure

- Opening pressure 3.5 psi
- Shutoff pressure 2.2 psi

Premium Plus+™ Tubing



Features


- Bowsmith Premium Plus+ tubing is manufactured from the highest grades of polyethylene resins.
- Contains a minimum of 2% carbon black.
- Every reel undergoes a series of tests to insure Bowsmith's high quality manufacturing standards are met.
- Available in a wide range of diameters, wall thickness and coil lengths to accommodate required lengths of run, working pressures and terrain.
- Pre-punched and marked custom spacing are available for easy Fan-Jet® microsprinkler or NonStop® emitter installations.
- Manufactured in Exeter, California and Avon Park, Florida.
- Seven-year warranty backs it all up. (See warranty for details)

Dimensions

Size Designation*	Nominal Tubing Size			Pressure Rating	Coil Length (in.)	
	Outside Diam (in.)	Wall Thickness (in.)	Inside Diam (in.)		Standard	Custom
490P40	0.490	0.040	0.410	70	2000'	
590P40	0.590	0.040	0.510	58	1000'	
625P48	0.625	0.048	0.530	67	1000'	100', 500'
625P50	0.625	0.050	0.525	71	1000'	100', 500'
620/710	0.715	0.0475	0.620	57	1000'	100', 500'
700P48	0.700	0.048	0.605	59	1000'	100', 500'
700P50	0.700	0.050	0.600	63	1000'	100', 500'
700P55	0.700	0.055	0.590	70	1000'	100', 500'
720P48	0.720	0.048	0.625	57	1000'	500'
795P52	0.795	0.053	0.690	57	1000'	500'
720/820	0.825	0.0525	0.720	55	1000'	500'
835P52	0.835	0.053	0.730	55	1000'	500'
935P62	0.935	0.063	0.811	57	1000'	500'
935P58	0.935	0.058	0.822	55	1000'	500'
3/4"-50	0.916	0.055	0.805	54	1000'	500'
1195P72	1.195	0.073	1.050	53	500', 660'	
1"-45	1.190	0.064	1.060	49	500', 660'	
1530P72	1.530	0.075	1.380	42	400'	
1-1/4"-50	1.540	0.0865	1.365	50	300'	

Jet Stake™

Spray Stake for Nursery or Landscape

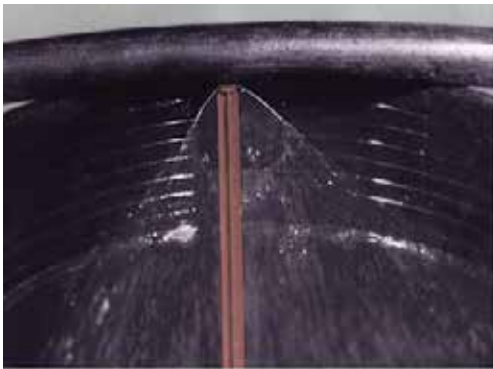

The Jet Stakes barbed inlet attaches securely to supply hose or distribution tubing.


Product Features

- Rabbit / Rodent resistant: when the Jet Stake is attached directly into the supply hose, feeder tubing is eliminated. Therefore virtually all damages caused by rabbits or rodents are eliminated also.
- 0.165" (4.2mm) barb inlet for secure connections to PE supply hose or distribution tubing ("0.160" [4.0mm] I.D. distribution tubing recommended).
- Overall length of 6 3/8" (16.2cm) insures stability when inserted into loose dirt or potting soil.
- Thread size at tapered end designed to quick-turn into "0.160" (4.0mm) I.D. tubing for shutoff at the watering site.
- Excellent distribution uniformity.
- High-grade resins in manufacture for mechanical stability and durability.


Standard models color-coded by flow rate:

- 3.5 GPH ~ yellow
 - 5.5 GPH ~ brown
 - 6.1 GPH ~ black
 - 8.6 GPH ~ orange
- (Nominal flow rates @ 20 PSI)
- Ideal for 5, 7, 10 or 15-gallon pots.
 - Excellent distribution uniformity.
 - UV inhibitors for long life.

Flow Rate vs. Pressure							
Stock #	Flow @ 20 PSI Nominal	Jet Stake Color	Pressure, PSI				
			10	20	30	40	50
1081	5.5	Brown	3.9	5.5	6.8	7.9	8.9
1082	6.1	Black	4.3	6.1	7.5	8.8	9.7
1083	8.6	Orange	6.0	8.6	10.6	12.2	13.5
1085	3.5	Yellow	2.5	3.5	4.3	4.9	5.5

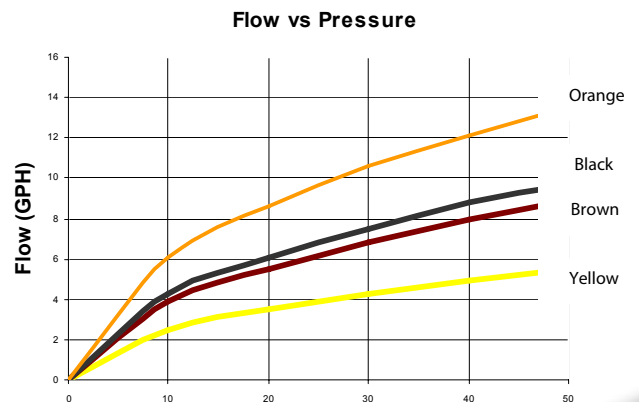

Vine Clip™ Clamping System



Product Features

Clamping system specially designed for hanging irrigation pipe or tubing to wire for use in overhead drip or microsprinkler applications.

Vine Clips

- Galvanized wire (2mm diameter wire)

Vine Clip Pliers

- Fast attachment of magazine-fed Vine Clips

Vine Clip Magazines

- Hold multiple Vine Clips per magazine

The Vine Clip System:

- Three times faster installation over traditional hose clamping systems. Saves on labor and materials.
- More reliable hold than other methods.
- Better Quality hold-allows for tubing dilation and contraction.



Description	Part No.	Specifications	Box Qty.	Carton Qty.
Vine Clip, 700 Series (Model E-42)	1027	2mm galvanized wire Hose O.D. : 17-20mm (0.670-0.787 in.)	1,080	6
Vine Clip, 700 Series Hand Pliers / Magazine (Model E-42)	1025	Hand Pliers and Magazine are an integral unit	N/A	N/A
Vine Clip, 800 Series (Model E-50)	1029	2mm galvanized wire Hose O.D. : 21-24mm (0.827-0.945 in.)	500	10
Vine Clip, 800 Series Hand Pliers / Magazine (Model E-50)	1028	Hand Pliers and Magazine are an integral unit	N/A	N/A
Vine Clip, 900 Series (Model E-55)	1031	2mm galvanized wire Hose O.D.: 25-28mm (0.984-1.103 in)	575	4
Vine Clip, 900 Series Hand Pliers / Magazine (Model E-55)	1030	Hand Pliers and Magazine are an integral unit	N/A	N/A

Manufactured by:





Friction Loss vs. Flow

Bowsmith Premium Polyethylene Tubing

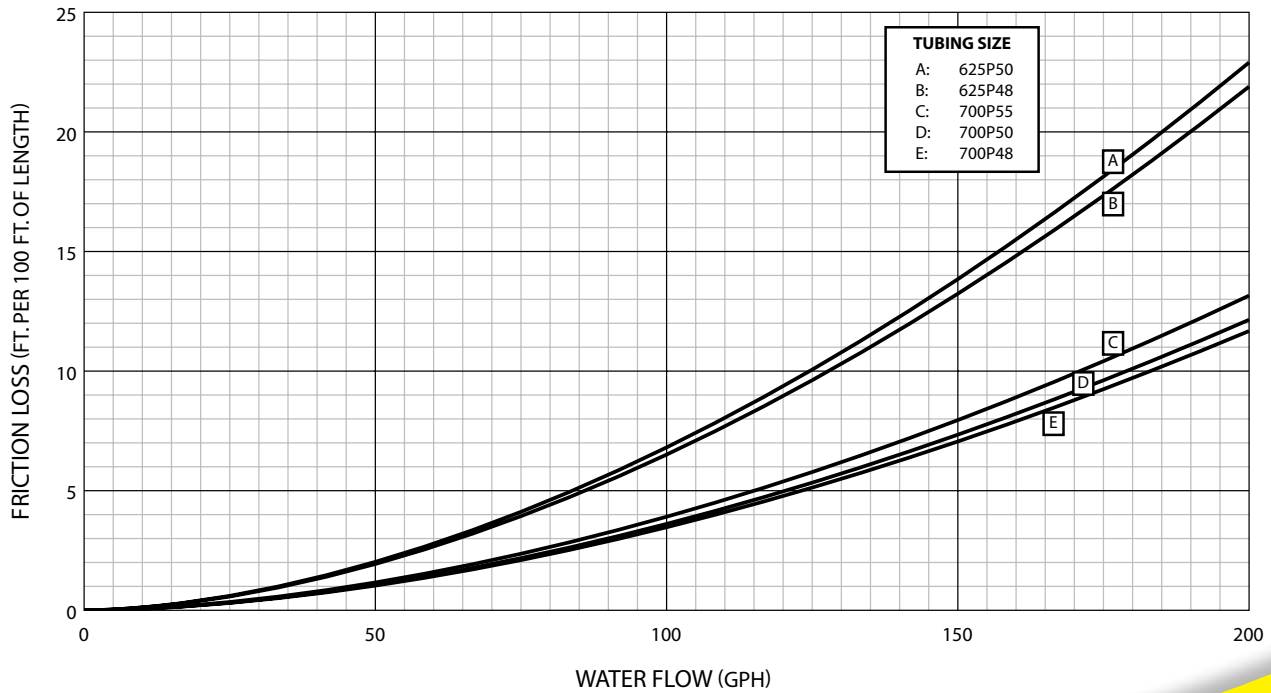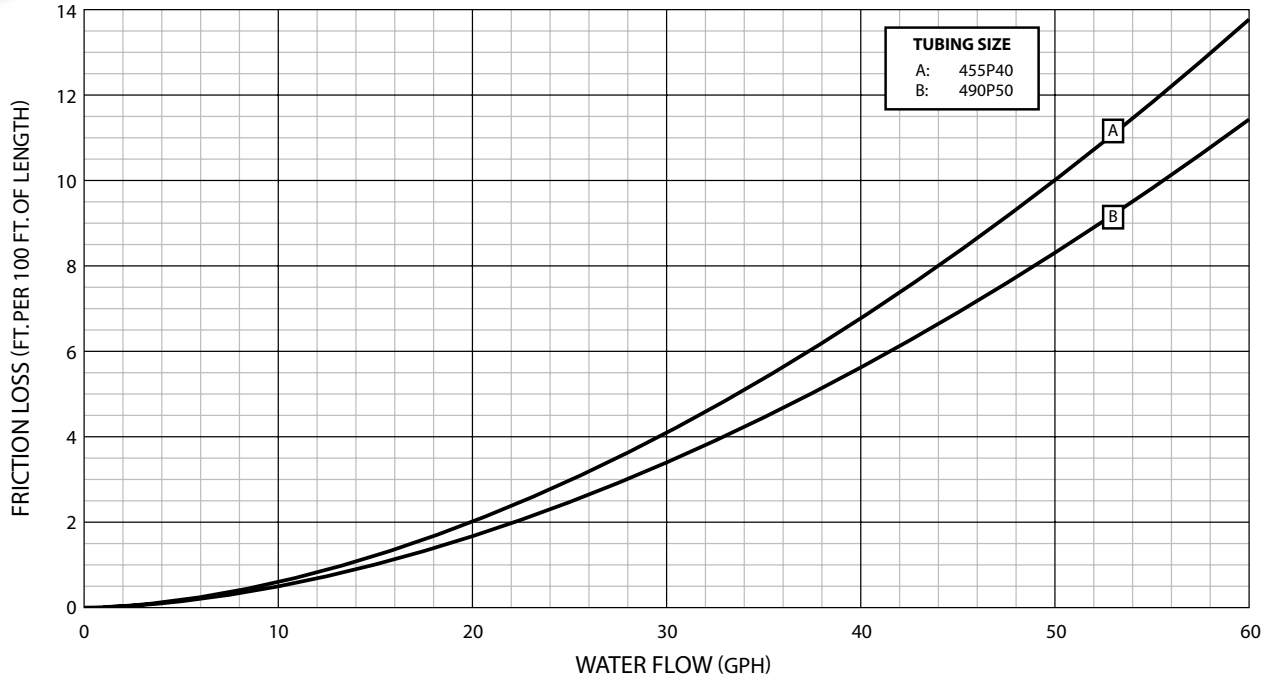

Friction Loss vs. Flow


Bowsmith Premium Polyethylene Tubing

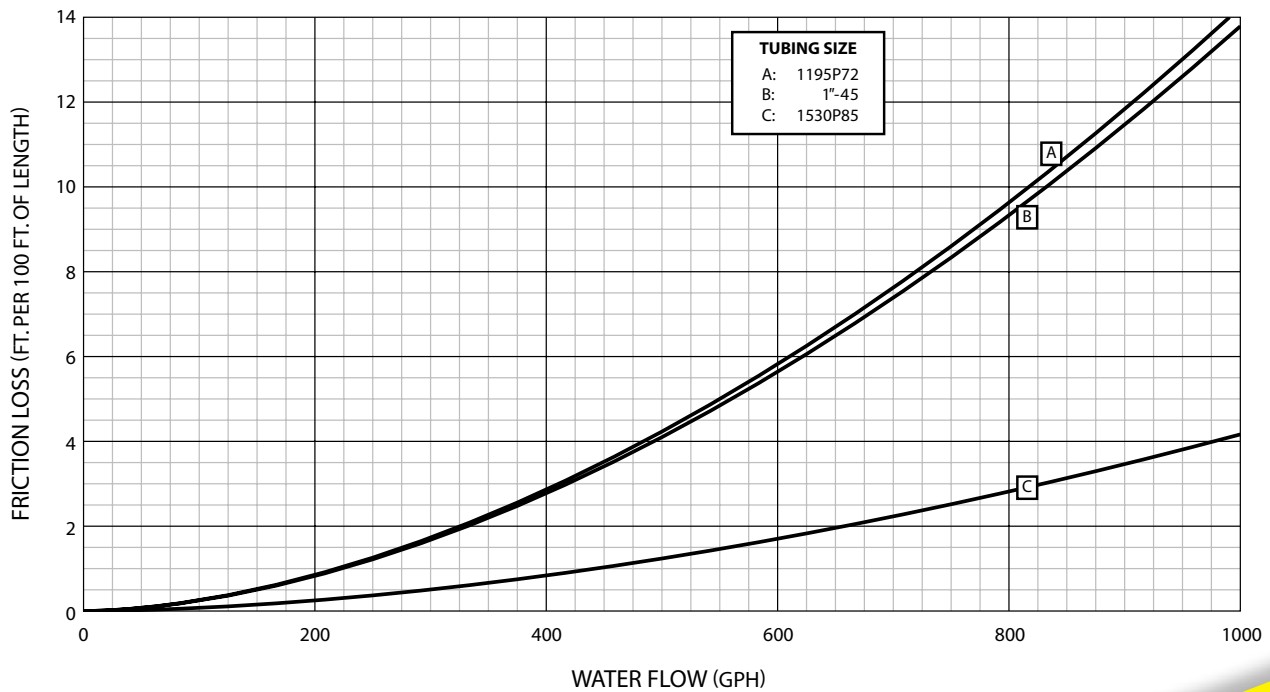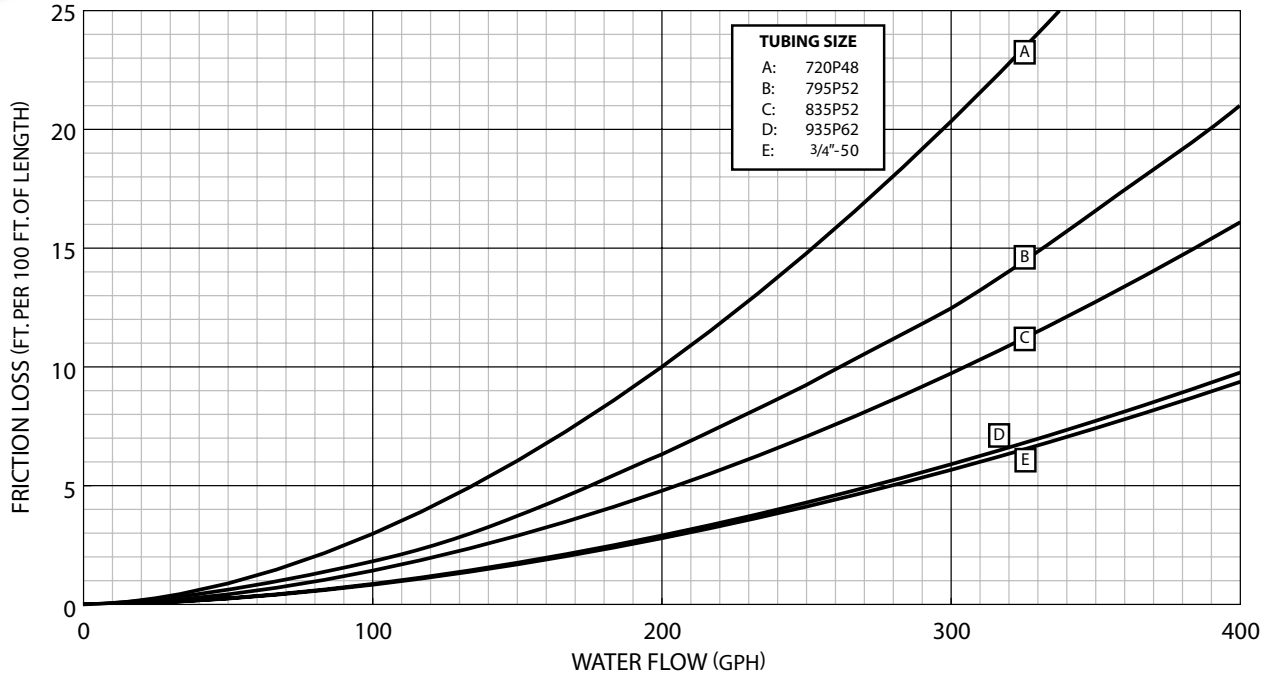

Friction Loss vs. Flow

Bowsmith Fan-Jet® Feeder Tube


0.140" I.D. Vinyl and 0.160" I.D. Polyethylene

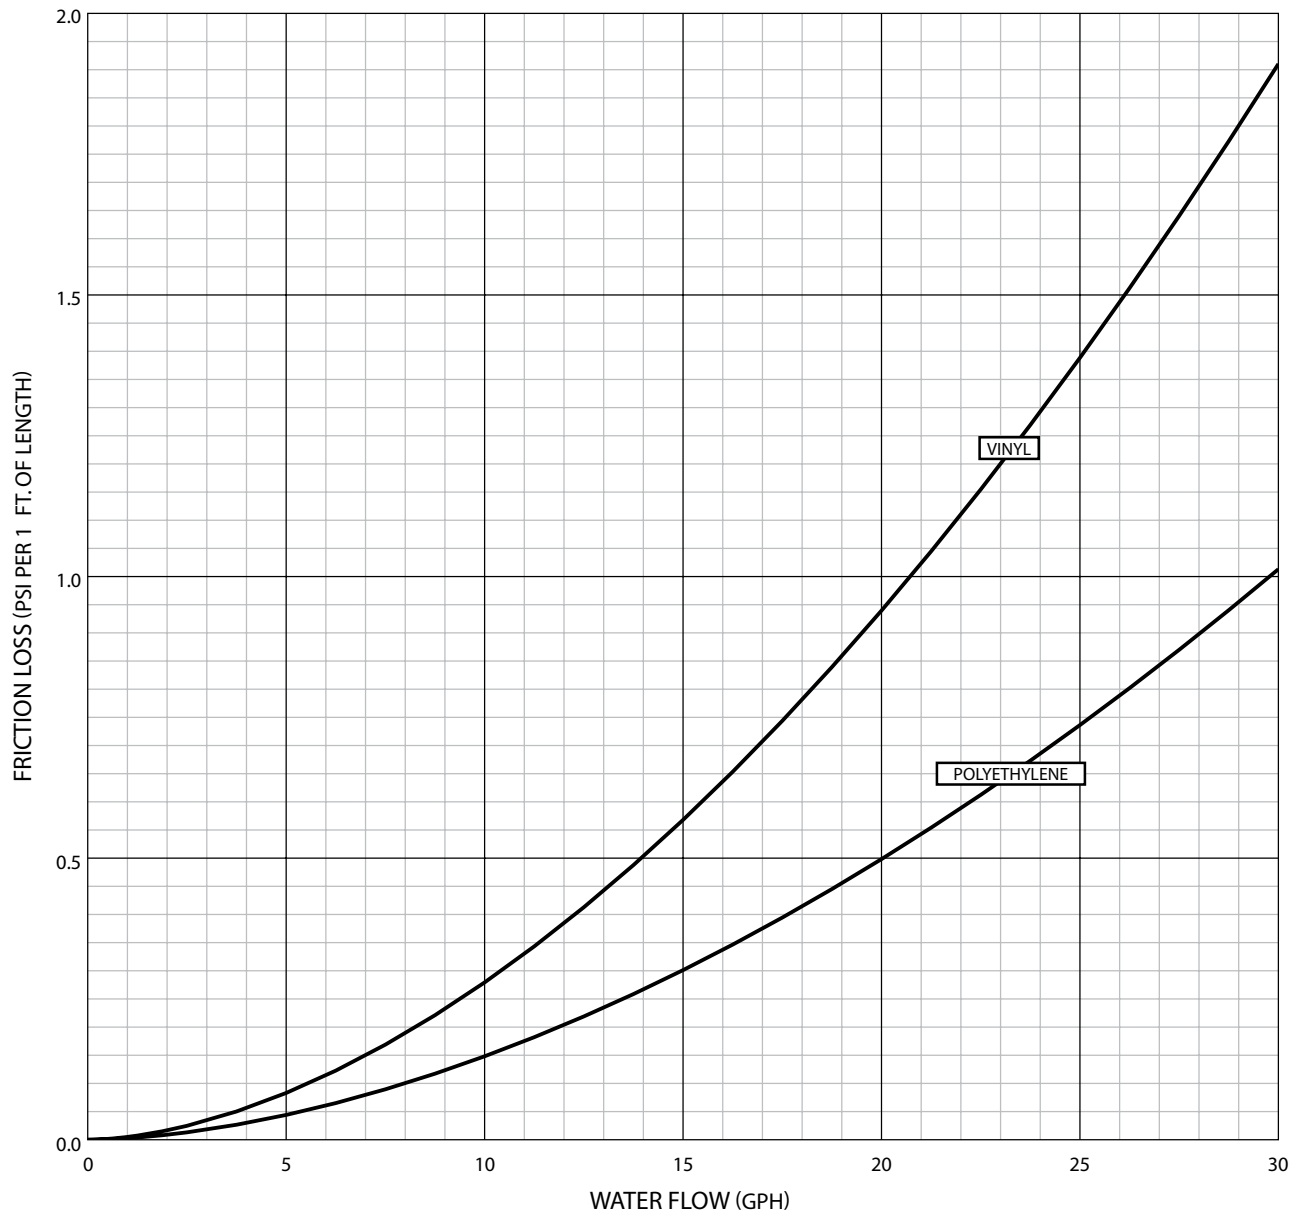


Feeder Tube Length vs. Fan-Jet® Flow

Bowsmith Fan-Jet® Feeder Tube and Coupling


0.140" I.D. Vinyl
20 Psi Line Pressure

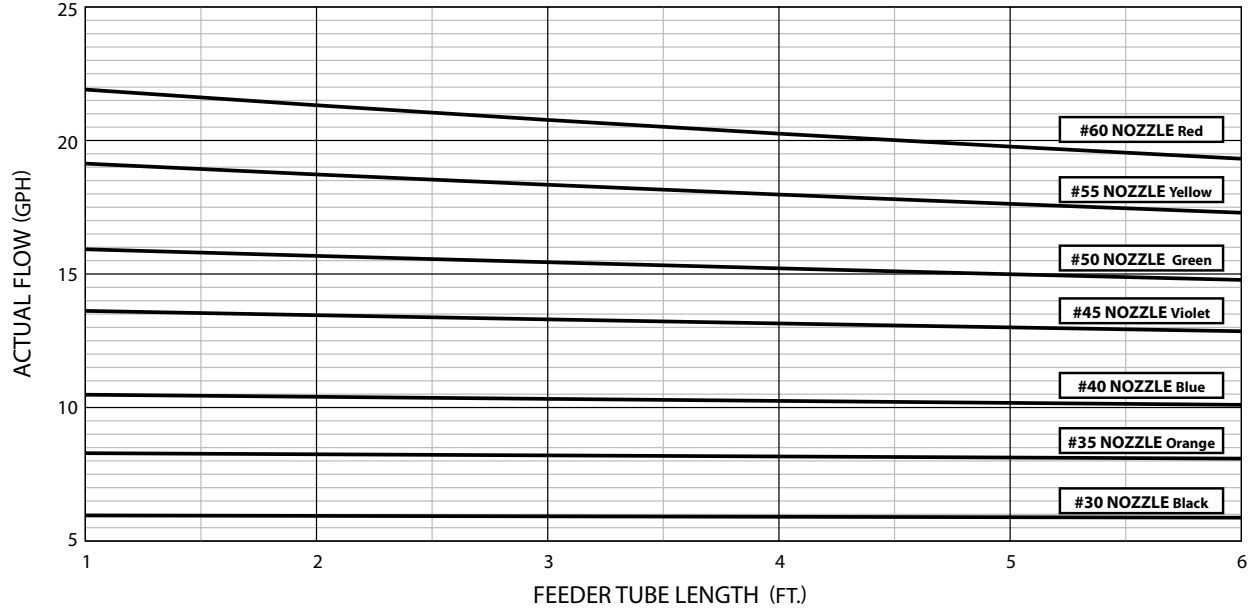

0.160" I.D. Polyethylene
20 Psi Line Pressure

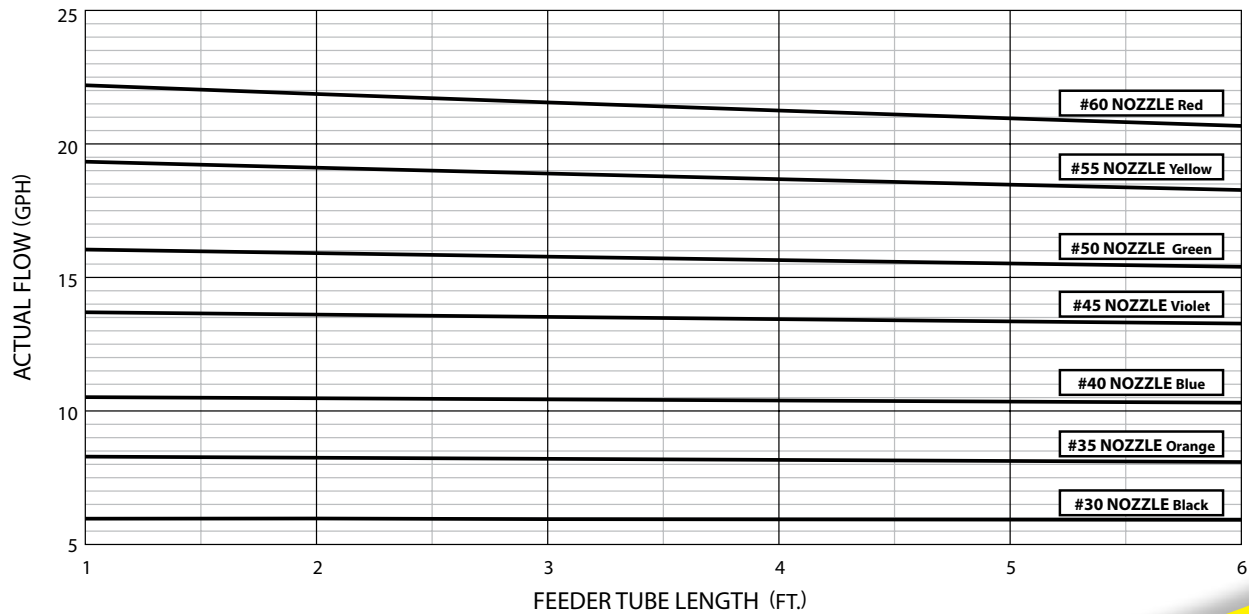


Fan-Jet® Flow vs. Nozzle Pressure

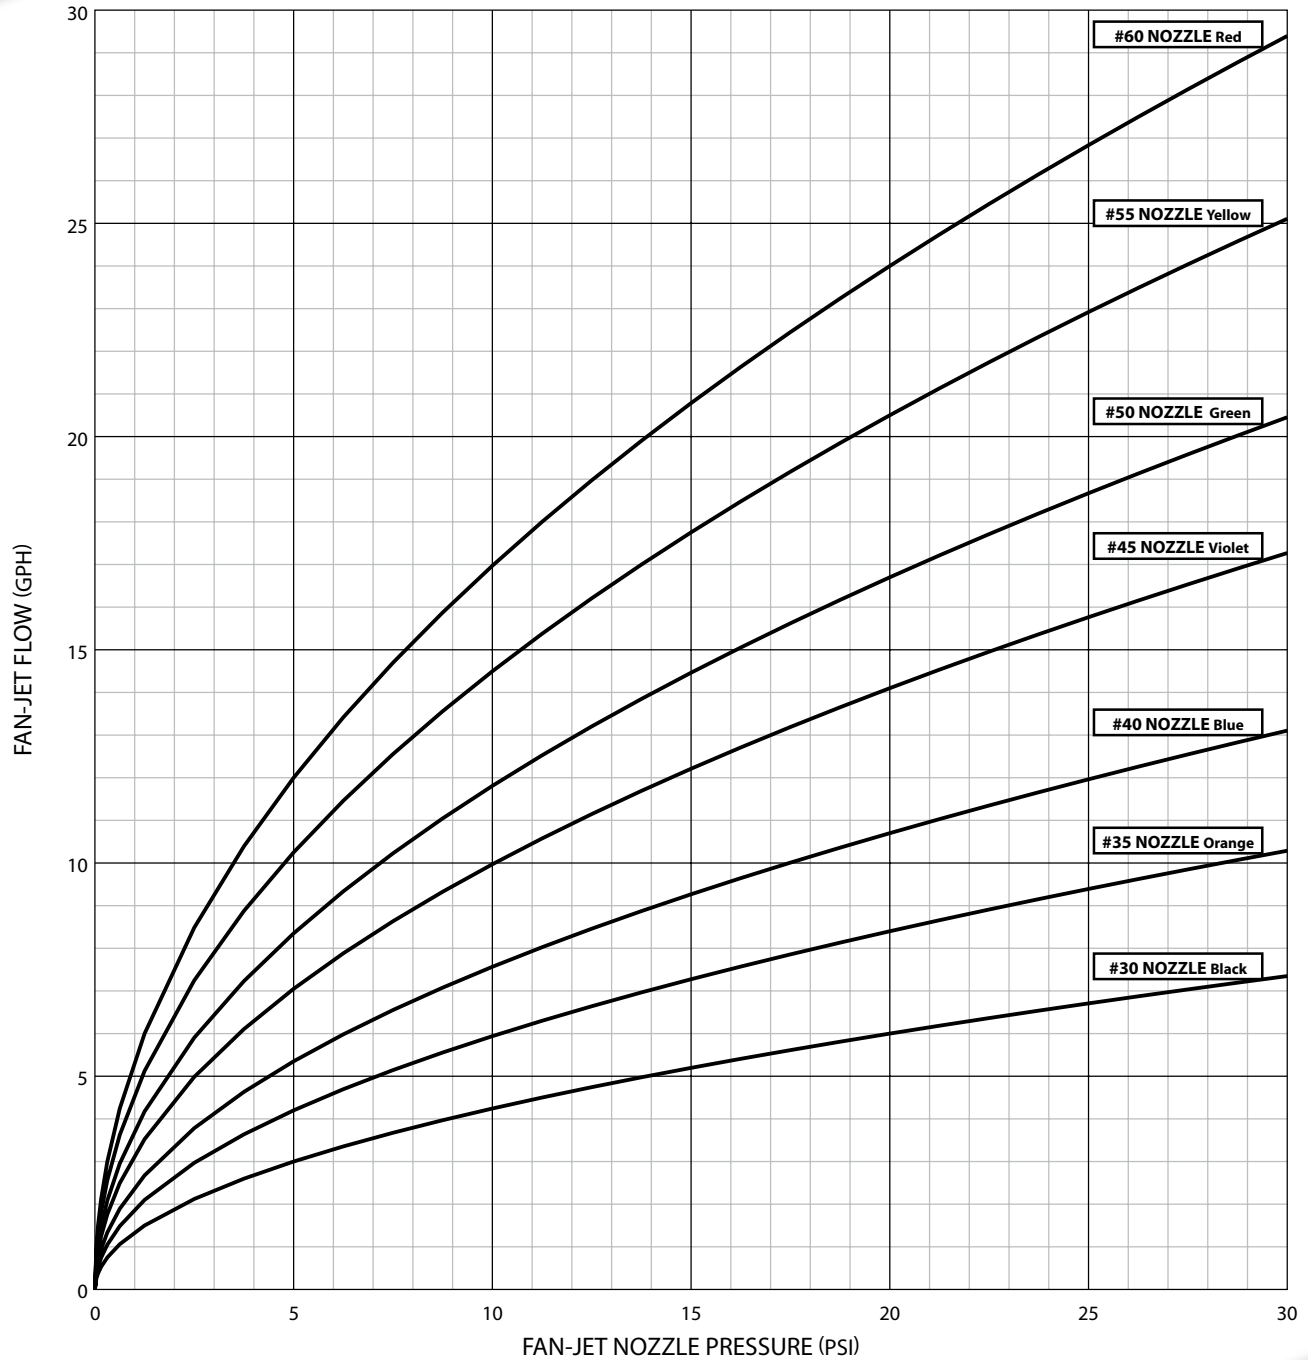

Flow vs. Pressure Loss

Bowsmith Fan-Jet® Coupling

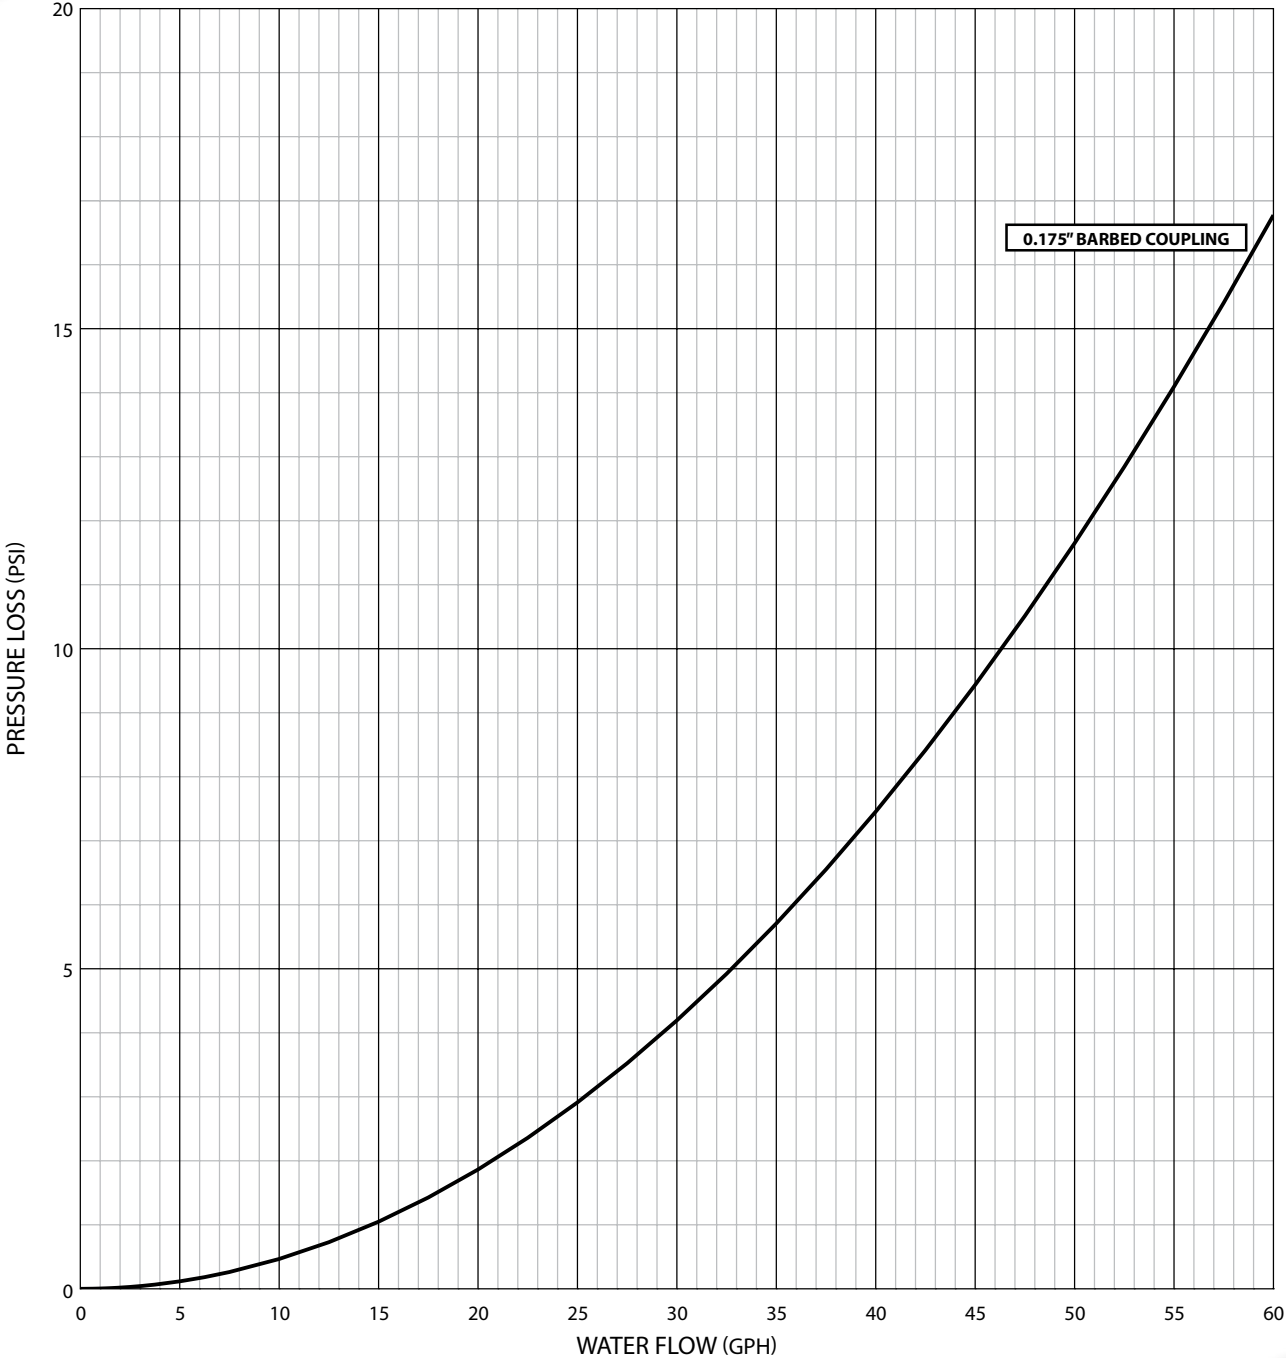


Lateral Line Length vs. Discharge Gradient

Bowsmith NonStop® and Tru-Flo® Drip Emitters


±5% ALLOWABLE FLOW VARIATION; LEVEL GROUND

NonStop: 20 PSI avg. pressure (21.5 PSI inlet) TruFlo: 15 PSI avg. pressure (16.5 PSI inlet)

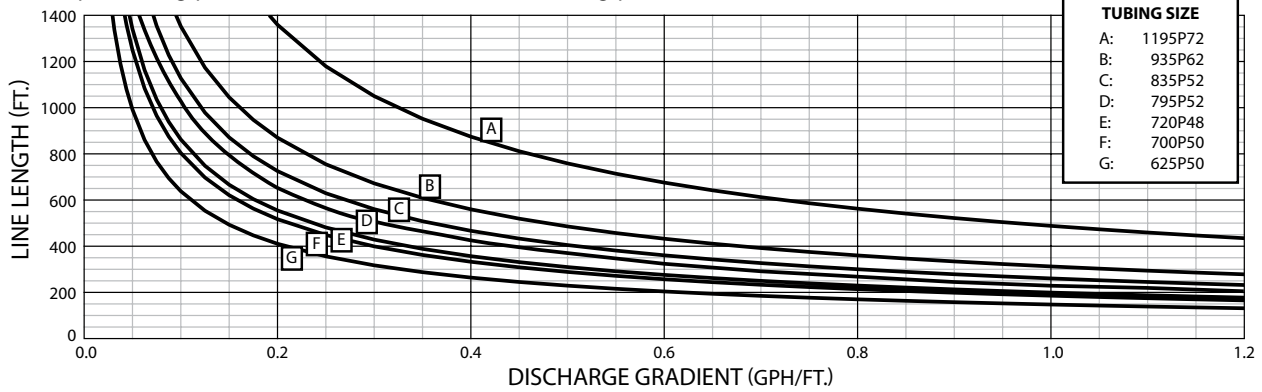


±10% ALLOWABLE FLOW VARIATION; LEVEL GROUND

NonStop: 20 PSI avg. pressure (23.0 PSI inlet) TruFlo: 15 PSI avg. pressure (18.2 PSI inlet)

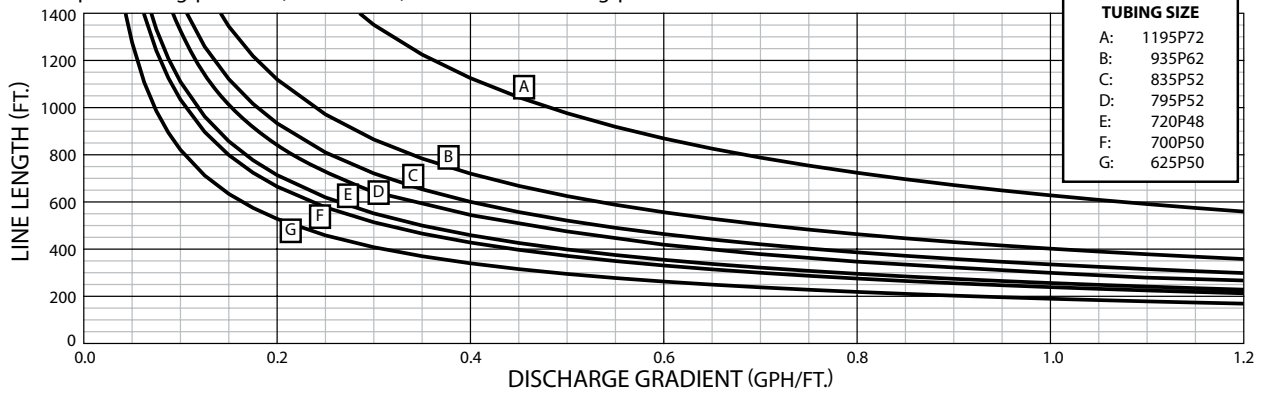

±15% ALLOWABLE FLOW VARIATION; LEVEL GROUND

NonStop: 20 PSI avg. pressure (24.5 PSI inlet) TruFlo: 15 PSI avg. pressure (19.8 PSI inlet)

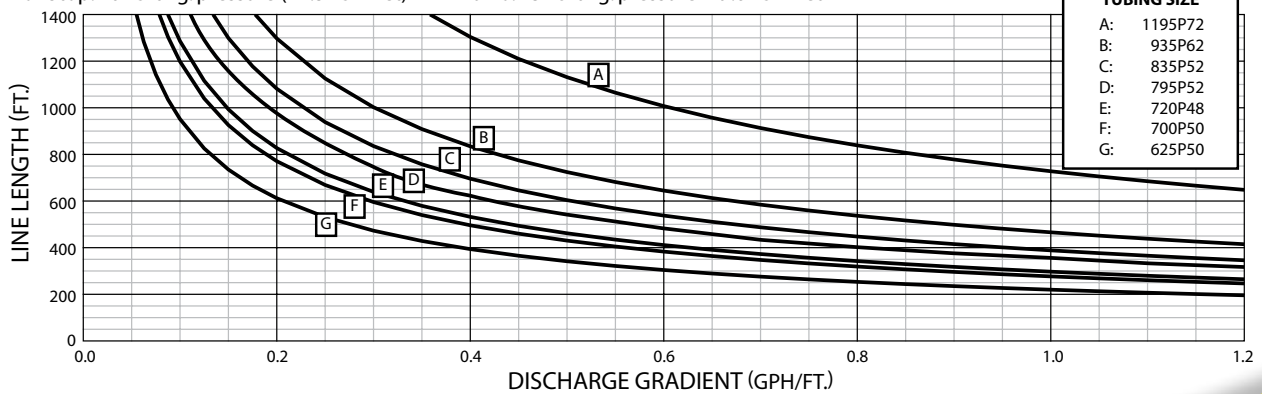


Lateral Line Length vs. Discharge Gradient

Bowsmith Fan-Jet® Microsprinklers


±5% ALLOWABLE FLOW VARIATION; LEVEL GROUND

20 PSI avg. line pressure (22.1 PSI inlet)

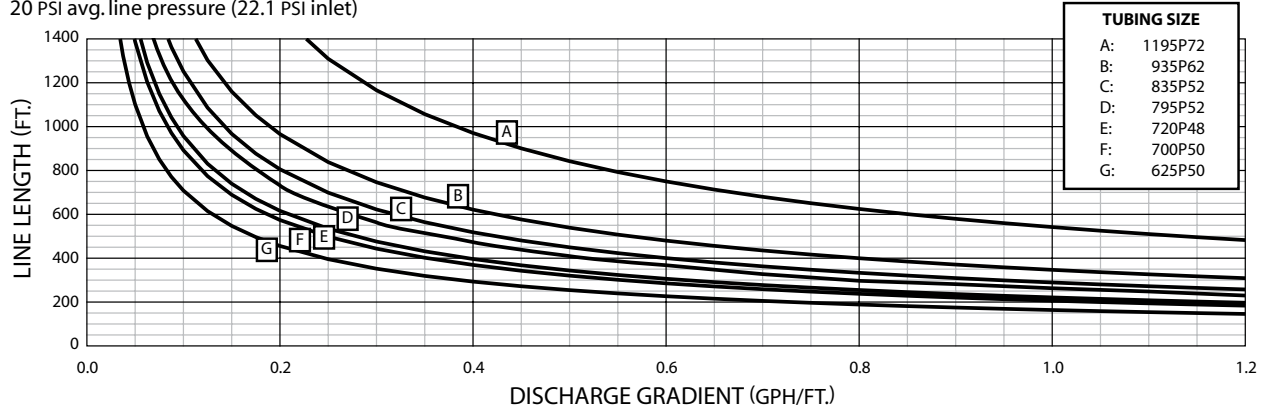


±10% ALLOWABLE FLOW VARIATION; LEVEL GROUND

20 PSI avg. line pressure (24.2 PSI inlet)

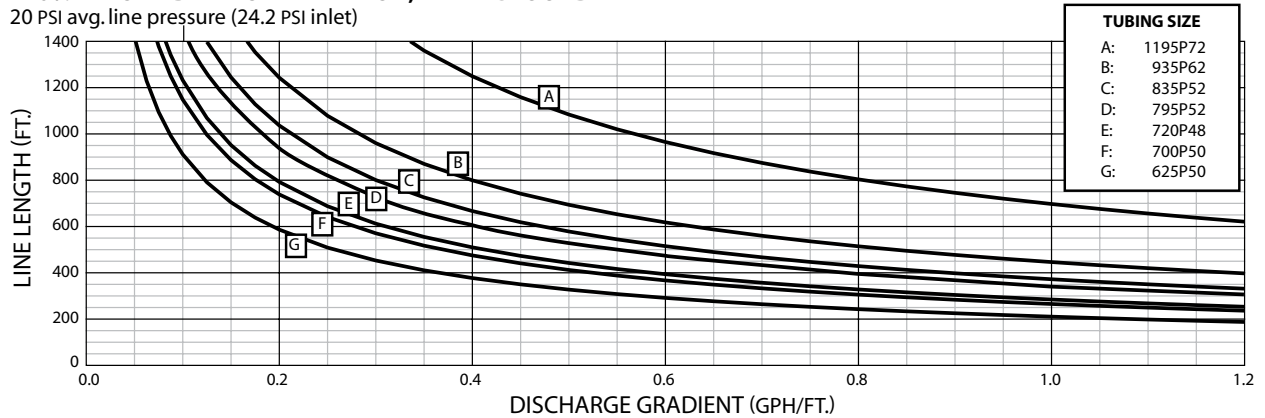

±15% ALLOWABLE FLOW VARIATION; LEVEL GROUND

20 PSI avg. pressure (26.5 PSI inlet)

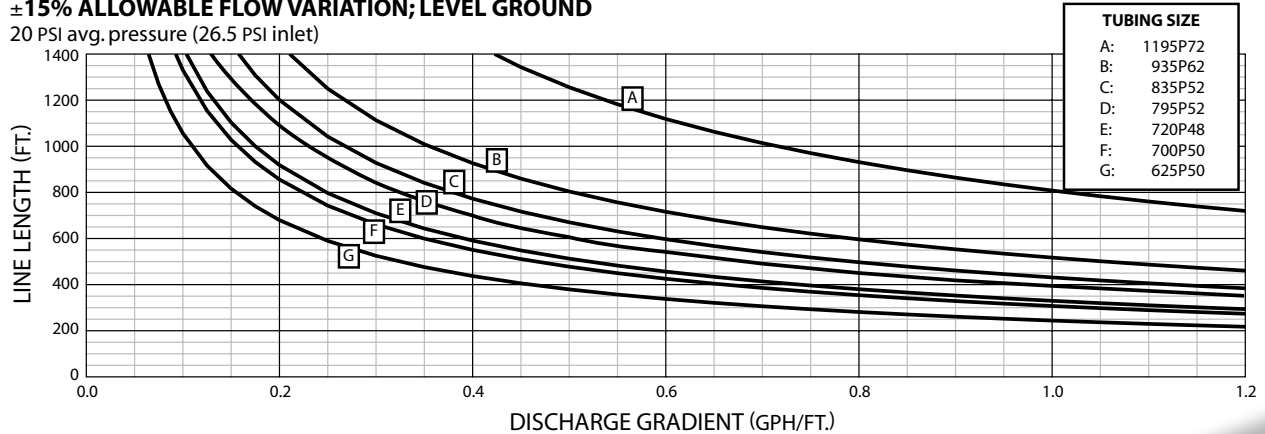


Combined Pressure Loss vs. Tube Length

Bowsmith Fan-Jet® Feeder Tube and Coupling


0.140" I.D. VINYL

20 PSI at base of Fan-Jet head

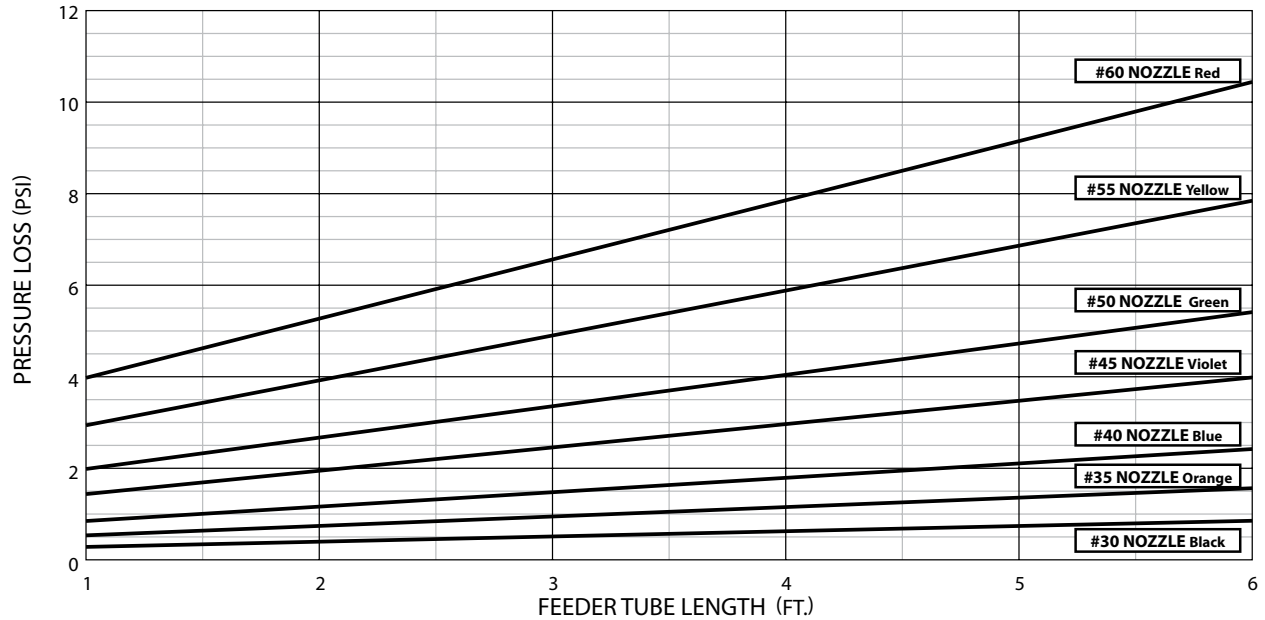

0.160" I.D. POLYETHYLENE

20 PSI at base of Fan-Jet head

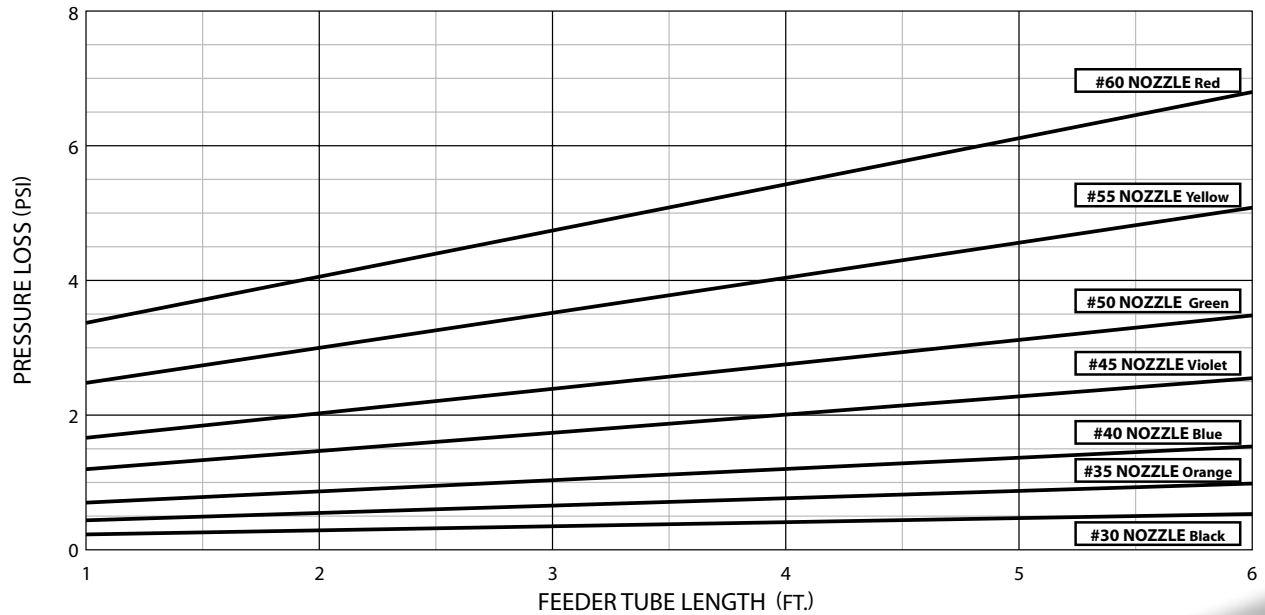


Tube Length vs Required Line Pressure

Bowsmith Fan-Jet® Feeder Tube and Coupling

VINYL FEEDER TUBES

Pressure required to obtain 20 PSI at Fan-Jet head base

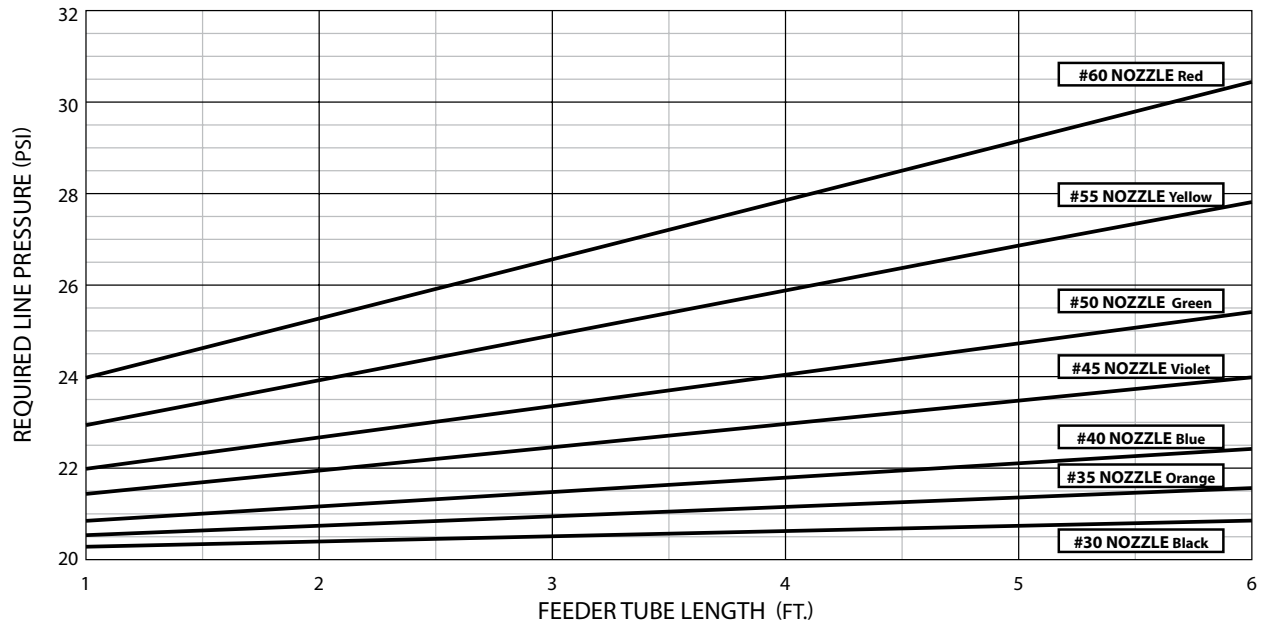

POLYETHYLENE FEEDER TUBES

Pressure required to obtain 20 PSI at Fan-Jet head base

